

## DE14TN 8 Ω

### SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	<b>25 mm (1 in)</b>
Nominal Impedance	<b>8 Ω</b>
Minimum Impedance	<b>7.4 Ω</b>
Nominal Power Handling	<b>30 W</b>
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	<b>60 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>105 dB</b>
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	<b>1.5 kHz - 18 kHz</b>
Recommended Crossover	<b>2.2 kHz</b>
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	<b>36 mm (1.4 in)</b>
Winding Material	<b>Aluminium</b>
Inductance	<b>0.14 mH</b>
Flux Density	<b>1.45 T</b>
Diaphragm Material	<b>Titanium</b>

- 60 W continuous program power capacity
- 1" horn throat diameter
- 36 mm (1.4 in) aluminum voice coil
- Titanium diaphragm
- 1500 - 18000 Hz response
- 105 dB sensitivity

### MOUNTING AND SHIPPING INFO

Two M5 holes 180° on 76 mm (3 in) diameter Three M6 holes 120° on 57 mm (2.2 in) diameter



Overall Diameter	<b>90 mm (3.5 in)</b>
Depth	<b>49 mm (2 in)</b>
Net Weight	<b>1 kg (2.2 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>1.03 kg (2.27 lb)</b>
Shipping Box	<b>105x105x65 mm</b> <b>(4.13x4.13x2.56 in)</b>

### SERVICE KITS

HF replacement-diaphragm	<b>MMD014TN8</b>
--------------------------	------------------



**DE14TN 8 Ω**

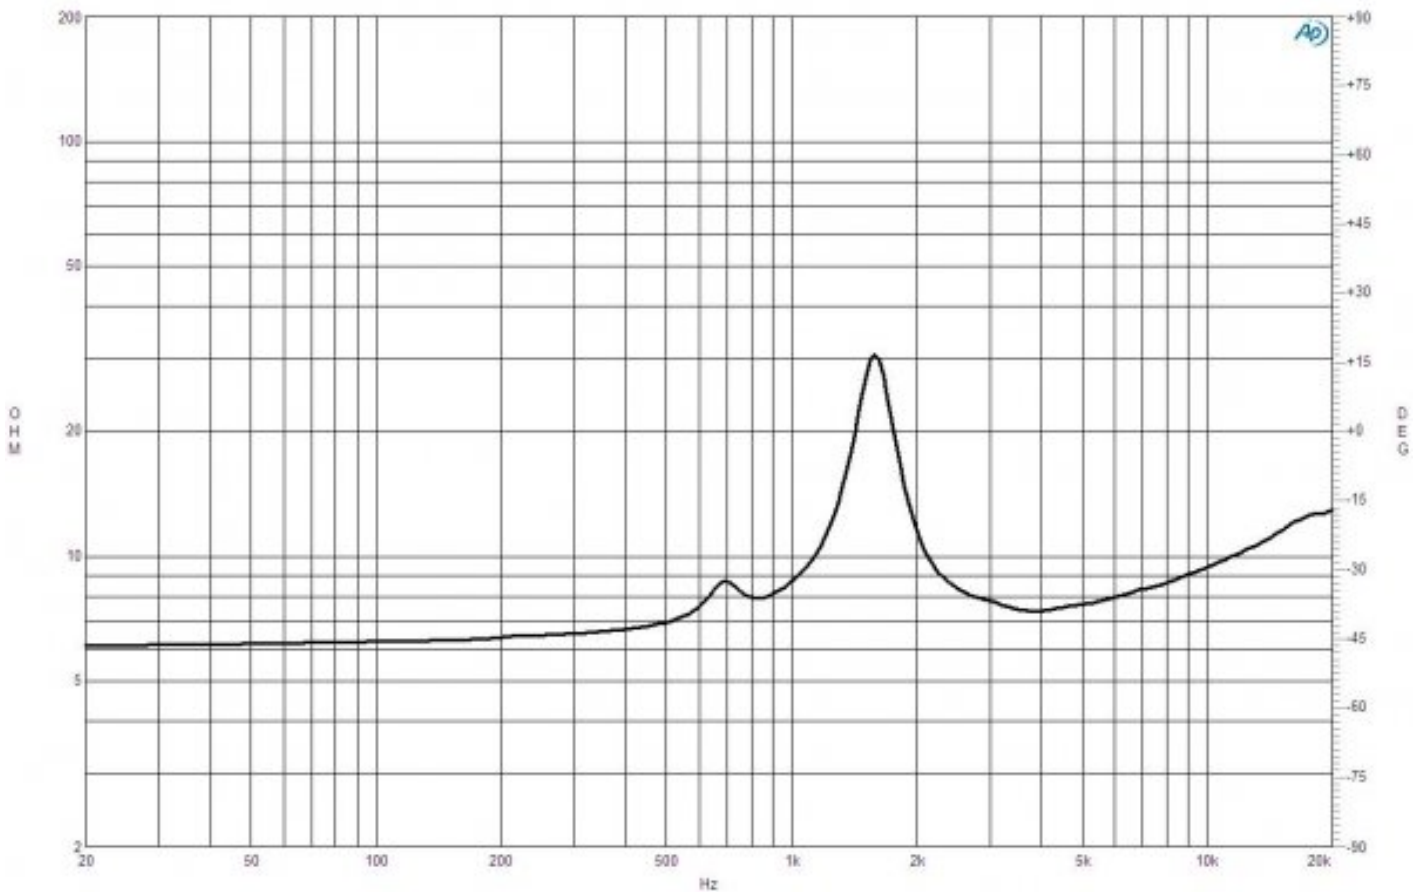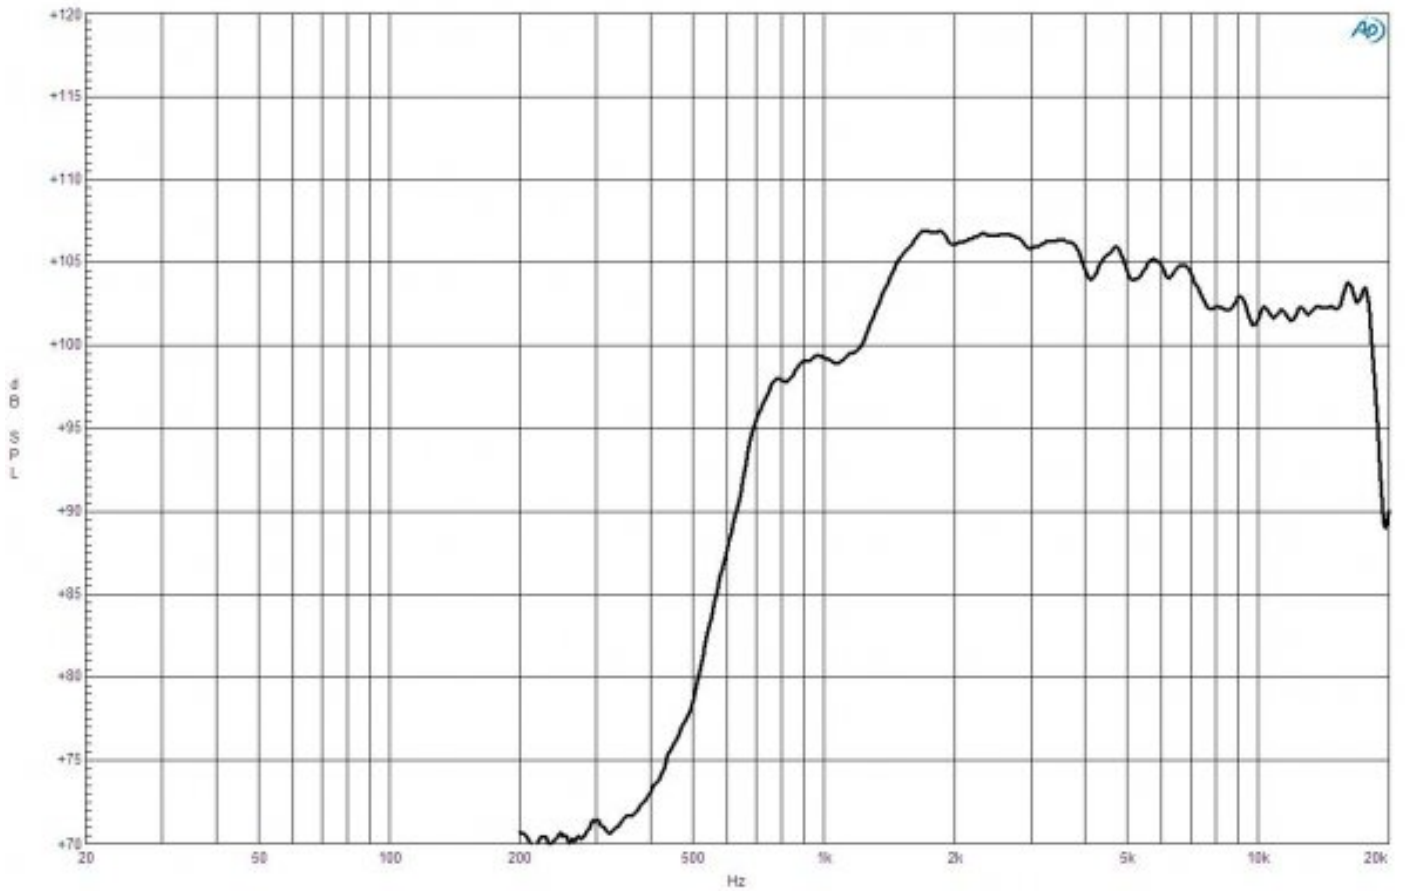

**DE14TN 8 Ω**

