


15NBX100




8Ω**LF Drivers** - 15.0 Inches

- 2000 W continuous program power capacity
- 100 mm (4 in) copper voice coil
- 35 - 1500 Hz response
- 97 dB sensitivity
- Aluminium demodulating ring allows a very low distortion figure
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression

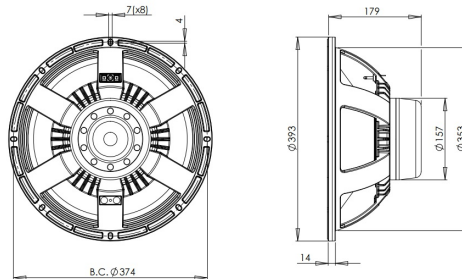

15NBX100

LF Drivers- 15.0 Inches

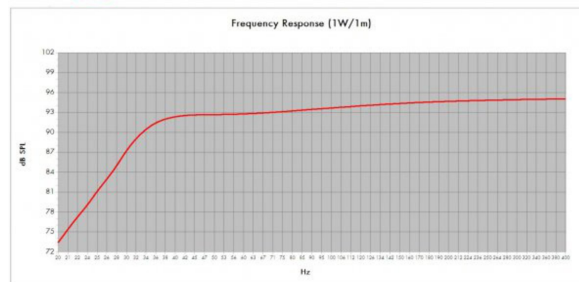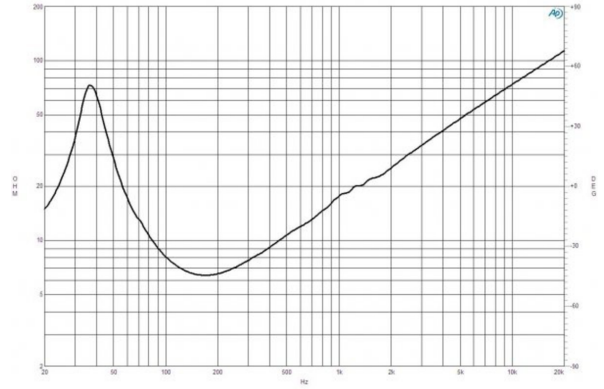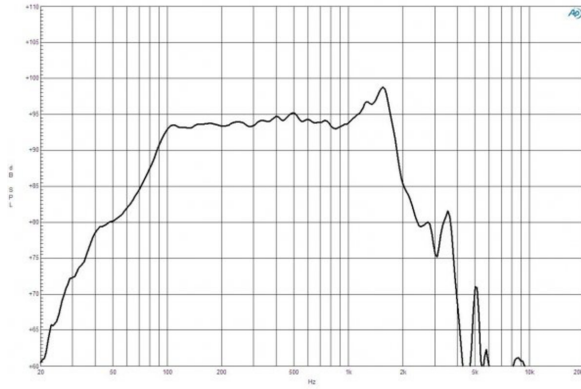

Model: 15NBX100
 Enclosure Type: Bass Reflex Configuration: One Driver
 Internal Net Volume (liters): 114 Q_B: 7
 Tuning Frequency (Hz): 33 Port Area (cm²): 222.9
 Frequency (±4dB) (Hz): 39.1 Port Length (cm): 33.2
 Excursion (limited Maximum SPL at 1 meter (dB): 120.4 equal to 416.2 Watts (Bass Band Power Rating)
 Thermal (limited Maximum SPL at 1 meter (dB): 123.1 equal to 1000.0 Watts (Mid Band Power Rating)

SPECIFICATIONS

Nominal Diameter	380 mm (15.0 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.4 Ω
Nominal Power Handling ¹	1000 W
Continuous power handling ²	2000 W
Sensitivity (1W/1m) ³	97.0 dB
Frequency Range	35 - 1500 Hz
Voice Coil Diameter	100 mm (4.0 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	25.0 mm (1.0 in)
Magnetic Gap Depth	11.0 mm (0.43 in)
Flux Density	1.1 T

DESIGN

Surround Shape	Triple Roll
Cone Shape	Exponential
Magnet Material	Neodymium Inside Slug
Spider	Double Silicone
Pole Design	T-Pole
Woofer Cone Treatment	TWP Waterproof Both Sides
Recommended Enclosure	114.0 dm ³ (4.0 ft ³)
Recommended Tuning	35 Hz

PARAMETERS⁴

Resonance Frequency	36 Hz
Re	5.1 Ω
Q _{es}	0.31
Q _{ms}	4.2
Q _{ts}	0.29
V _{as}	125.0 dm ³ (4.4 ft ³)
S _d	855.0 cm ² (132.5 in ²)
η _o	2.0 %
X _{max}	± 10.0 mm
X _{var}	± 10.0 mm
M _{ms}	151.0 g
Bl	25.0 Txm
Le	2.0 mH
EBP	116 Hz

MOUNTING AND SHIPPING INFO

Overall Diameter	393 mm (15.5 in)
Bolt Circle Diameter	374 mm (16.7 in)
Baffle Cutout Diameter	353.0 mm (13.9 in)
Depth	179 mm (7.05 in)
Flange and Gasket Thickness	14 mm (0.55 in)
Air Volume Occupied by Driver	6.0 dm ³ (0.21 ft ³)
Net Weight	9.55 kg (21.05 lb)
Shipping Units	1
Shipping Weight	9.85 kg (21.72 lb)
Shipping Box	425x425x224 mm (16.73x16.73x8.82 in)

SERVICE KIT

Recone kit	RCK15NBX1008
------------	--------------

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.