


- Line Array optimized Waveguide with DE980TN driver
- 120° max horizontal coverage
- 220 W continuous program power capacity
- 75 mm (3 in) CCAW voice coil
- Titanium diaphragm
- 500 - 18000 Hz response
- 108.5 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

Wave guide horn not sold separately

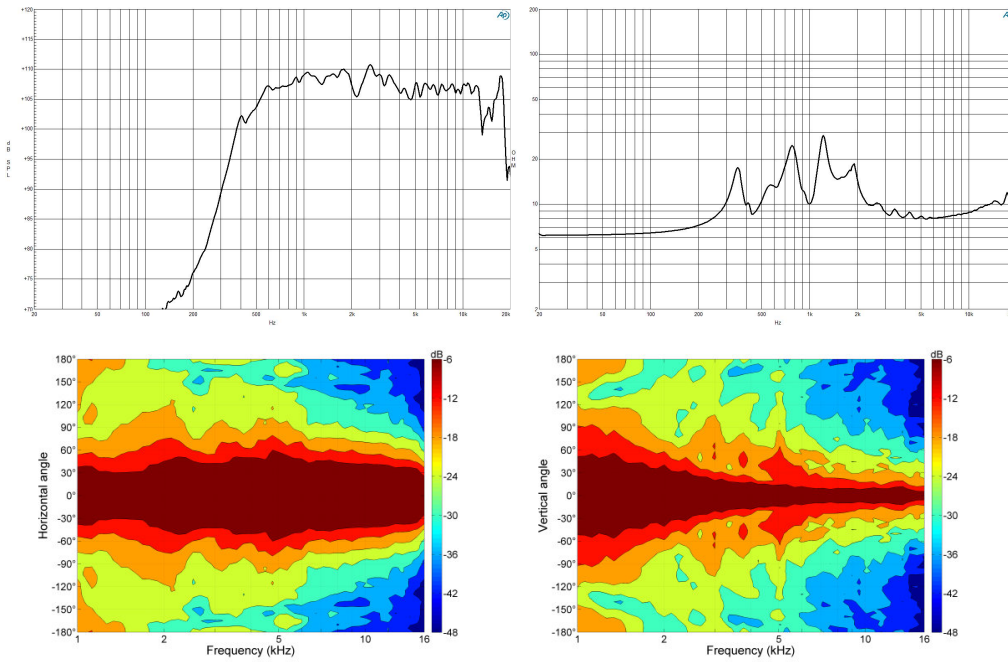

SPECIFICATIONS HORN UNIT

Waveguide mounted on 90°x10° bell horn

Nominal Impedance	8 Ω
Active Radiating Factor	93.7 %
Horizontal Coverage	120 ° Max

SERVICE KITS

HF replacement-diaphragm	MMD3DTN8M
--------------------------	-----------

SPECIFICATIONS HF UNIT

Minimum Impedance	8 Ω
Nominal Power Handling	110 W 2 hour test made with continuous pink noise signal (6 dB crest factor) within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	220 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	108.5 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	1 kHz - 18 kHz
Recommended Crossover	0.8 kHz 12 dB/oct. Or higher slope high-pass filter.
Voice Coil Diameter	75 mm (3 in)
Winding Material	CCAW
Flux Density	2.05 T
Diaphragm Material	Titanium

MOUNTING AND SHIPPING INFO

Exit Size	153x25 mm (6x1 in)
Net Weight	3.35 kg (7.39 lb)
Shipping Units	1 pcs
Shipping Weight	3.45 kg (7.61 lb)
Shipping Box	245x140x175 mm (9.65x5.51x6.89 in)
Driver Diameter	131 mm (5.16 in)
Dimensions	163x130x235 mm (6.4x5.1x9.3 in)