

DE910 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME90 horn.

| | |
|--|-----------------------|
| Throat Diameter | 33 mm (1.3 in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 8.3 Ω |
| Nominal Power Handling | 80 W |
| 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. | |
| Continuous Power Handling | 160 W |
| Power on Continuous Program is defined as 3 dB greater than the Nominal rating. | |
| Sensitivity | 109.5 dB |
| Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance. | |
| Frequency Range | 1 kHz - 18 kHz |
| Recommended Crossover | 1.2 kHz |
| 12 dB/oct. or higher slope high-pass filter. | |
| Voice Coil Diameter | 75 mm (3 in) |
| Winding Material | Aluminium |
| Inductance | 0.14 mH |
| Flux Density | 2.05 T |
| Diaphragm Material | Titanium |

- 160 W continuous program power capacity
- 1.3" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- Composite Polyester/Titanium diaphragm
- 500-18000 Hz response
- 109.5 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



| | |
|------------------|--|
| Overall Diameter | 131 mm (5.15 in) |
| Depth | 52 mm (2 in) |
| Net Weight | 2.4 kg (5.29 lb) |
| Shipping Units | 1 pcs |
| Shipping Weight | 2.45 kg (5.4 lb) |
| Shipping Box | 140x135x62 mm (5.51x5.31x2.44 in) |

SERVICE KITS

| | |
|--------------------------|----------------|
| HF replacement-diaphragm | MMD3B8M |
|--------------------------|----------------|



DE910 8 Ω

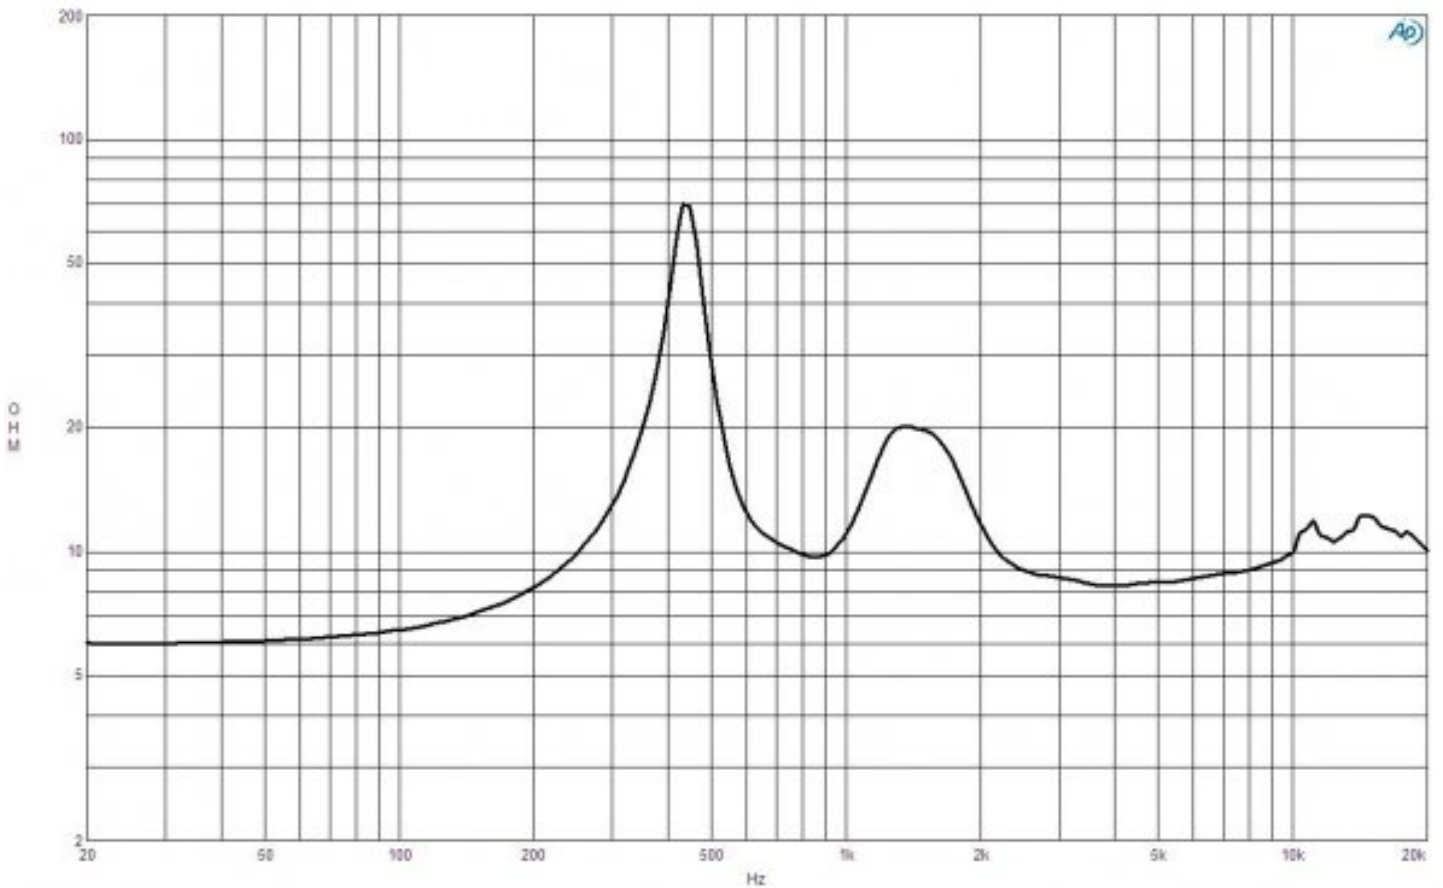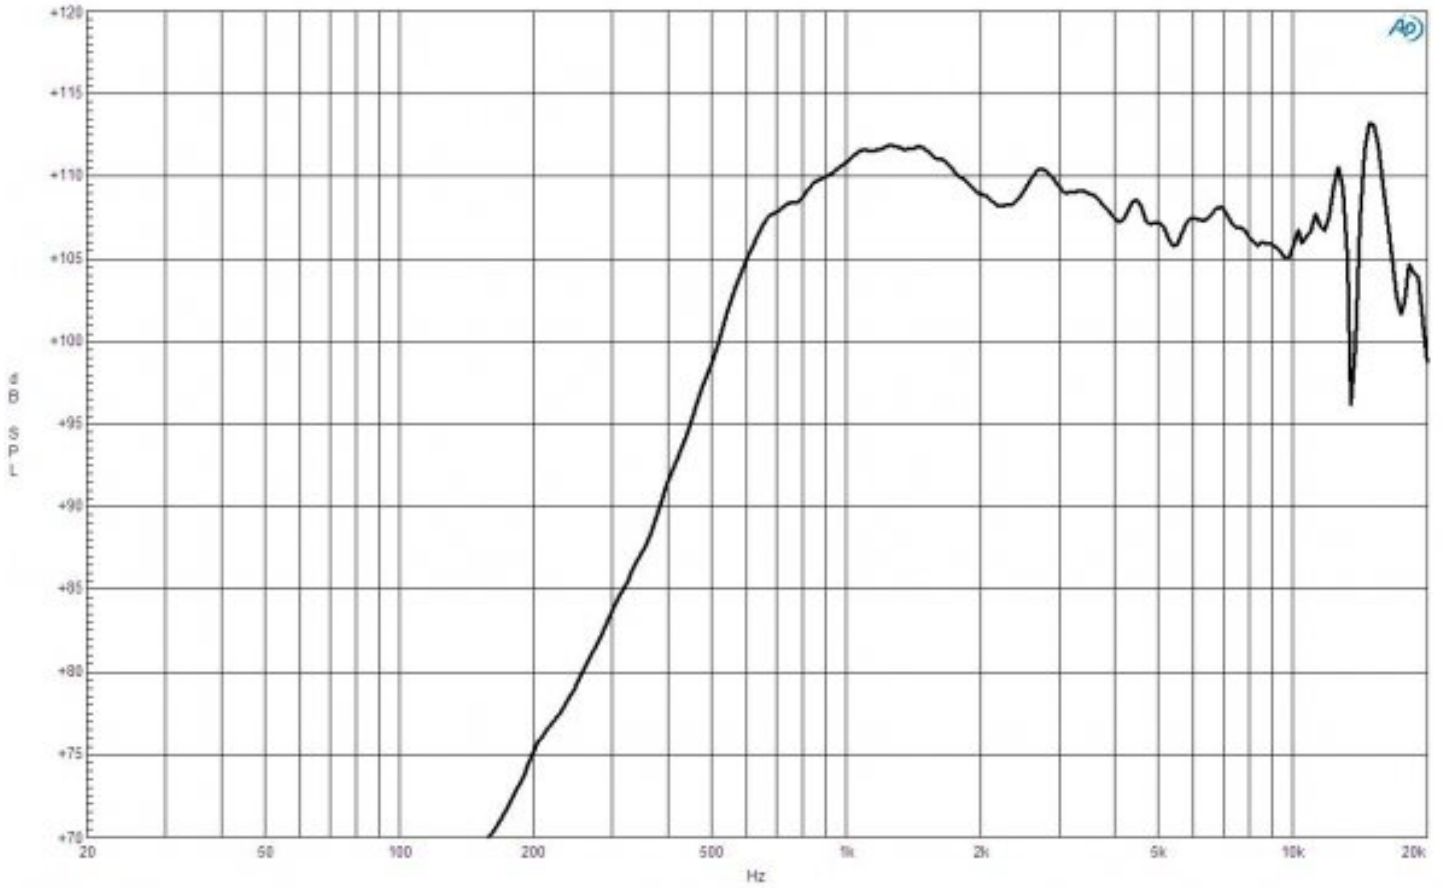

DE910 8 Ω

