

DE900TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.8 Ω
Nominal Power Handling	110 W
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	220 W
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	108.5 dB
<small>Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.</small>	
Frequency Range	1 kHz - 18 kHz
Recommended Crossover	1.2 kHz
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	2.05 T
Diaphragm Material	Titanium

- 220 W continuous program power capacity
- 1.4" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- Titanium diaphragm
- 500 - 18000 Hz response
- 108.5 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



Overall Diameter	131 mm (5.2 in)
Depth	65 mm (2.6 in)
Net Weight	2.55 kg (5.62 lb)
Shipping Units	1 pcs
Shipping Weight	3 kg (6.61 lb)
Shipping Box	140x140x70 mm (5.51x5.51x2.76 in)

SERVICE KITS

HF replacement-diaphragm	MMD3BTN8M
--------------------------	------------------



DE900TN 8 Ω

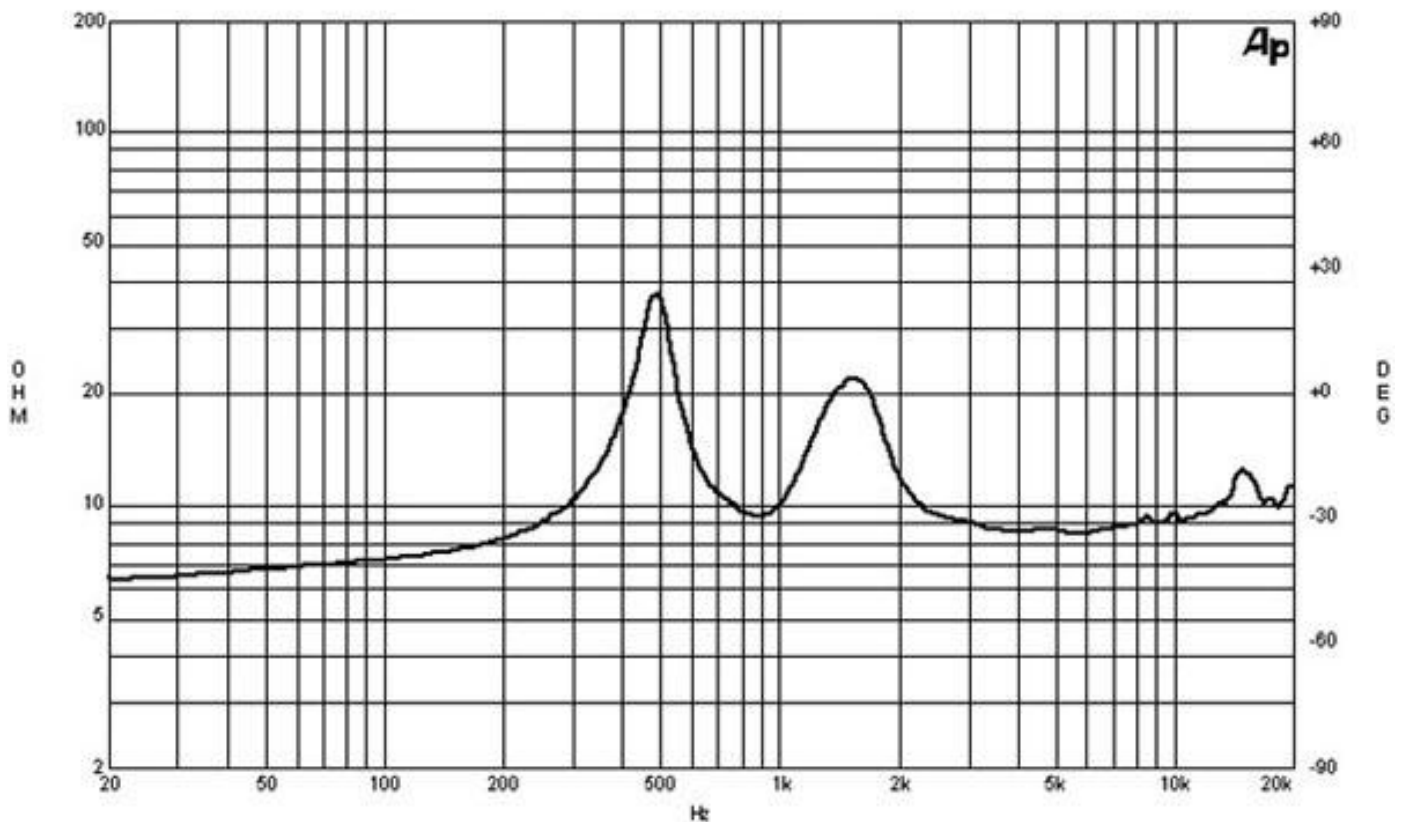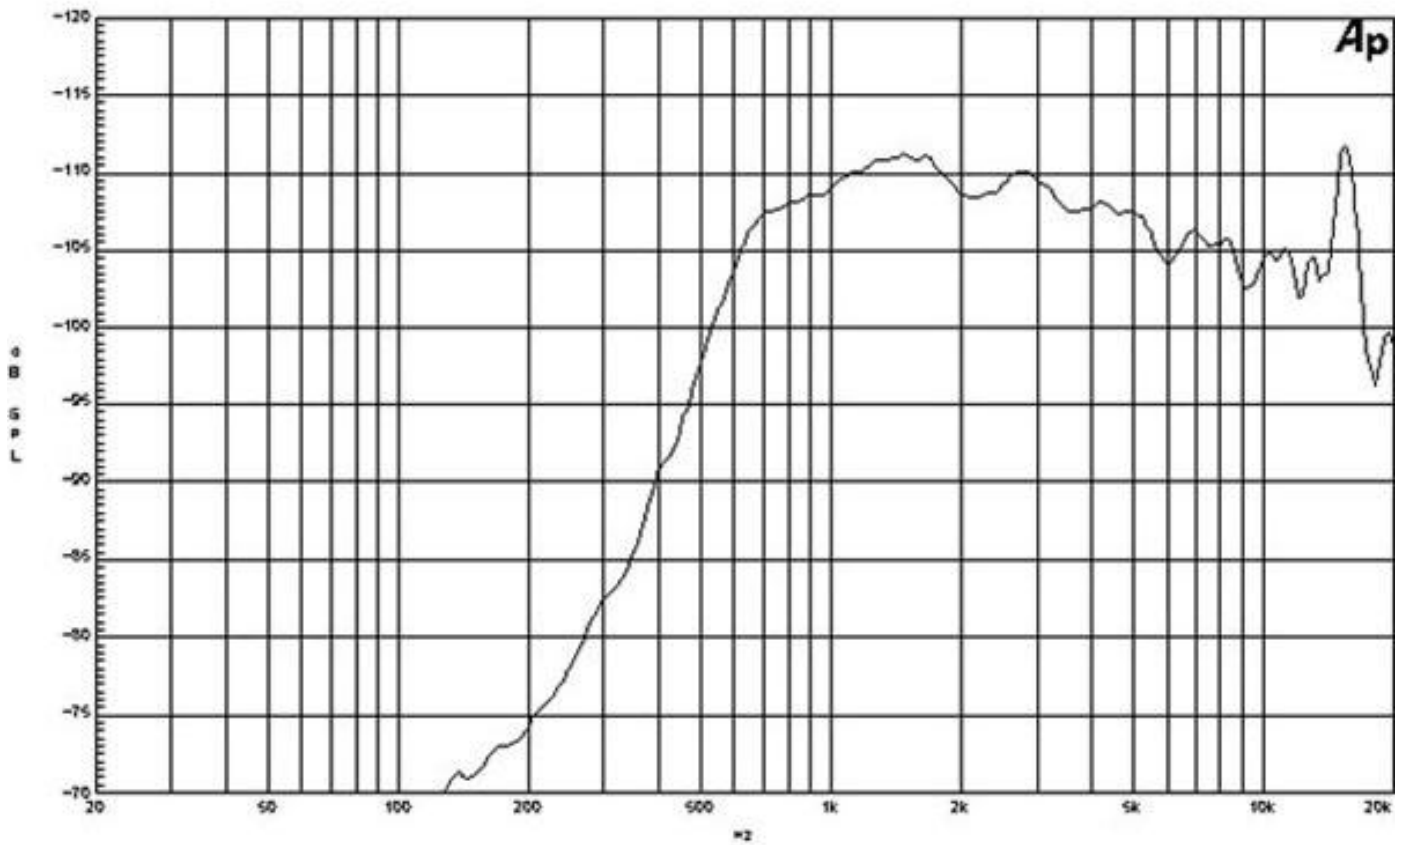

DE900TN 8 Ω

