

DE10 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 10 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.3 Ω
Nominal Power Handling	20 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	40 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	107 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1.5 kHz - 18 kHz
Recommended Crossover	2.5 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	25 mm (1 in)
Winding Material	Aluminium
Inductance	0.1 mH
Flux Density	1.55 T
Diaphragm Material	Mylar

- 40 W continuous program power capacity
- 1" horn throat diameter
- 25 mm (1 in) aluminium voice coil
- Polyester diaphragm
- 1500 - 18000 Hz response
- 107 dB sensitivity

MOUNTING AND SHIPPING INFO

Two M5 holes 180° on 76 mm (3 in) diameter



Overall Diameter	90 mm (3.5 in)
Depth	53 mm (2.1 in)
Net Weight	0.8 kg (1.8 lb)
Shipping Units	1 pcs
Shipping Weight	0.83 kg (1.82 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMD0108
--------------------------	----------------



DE10 8 Ω

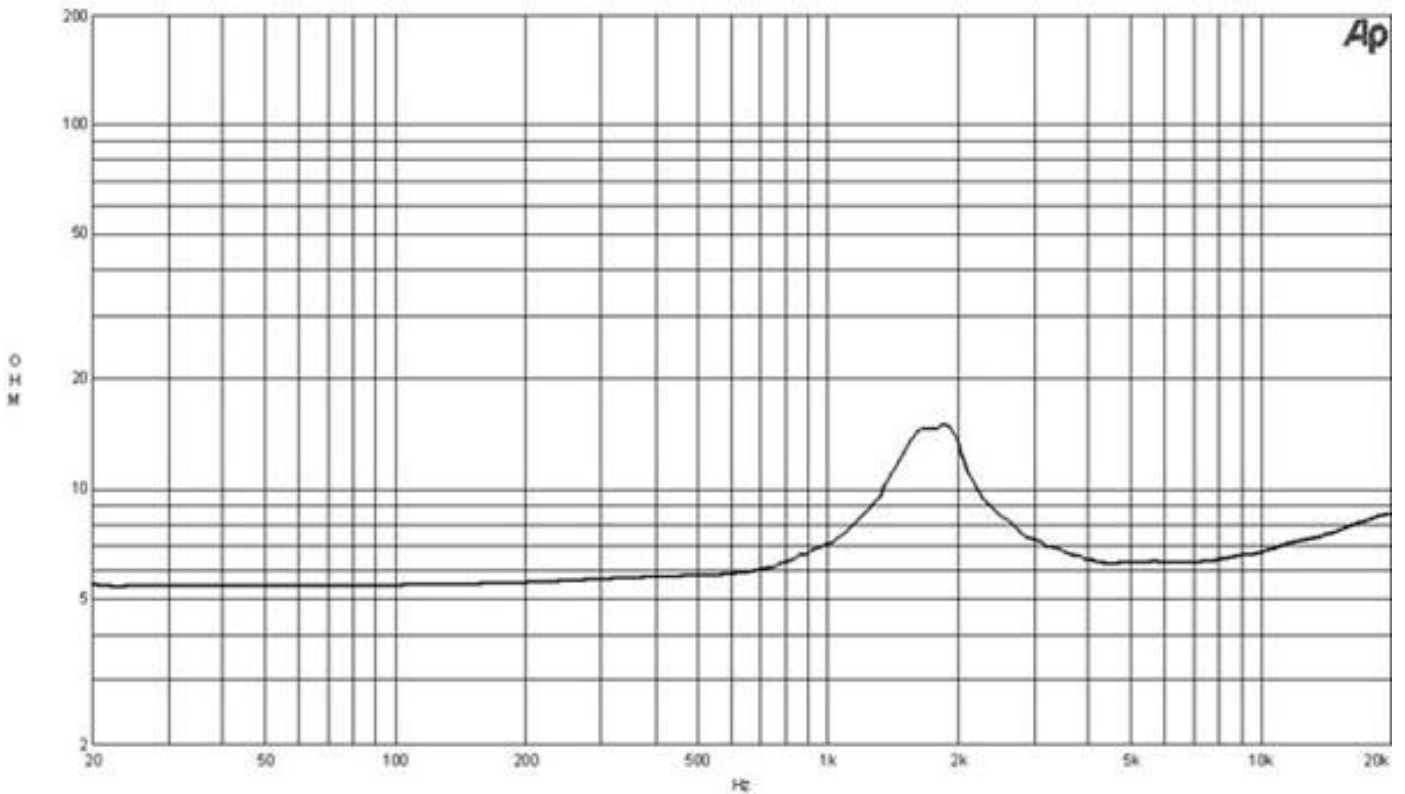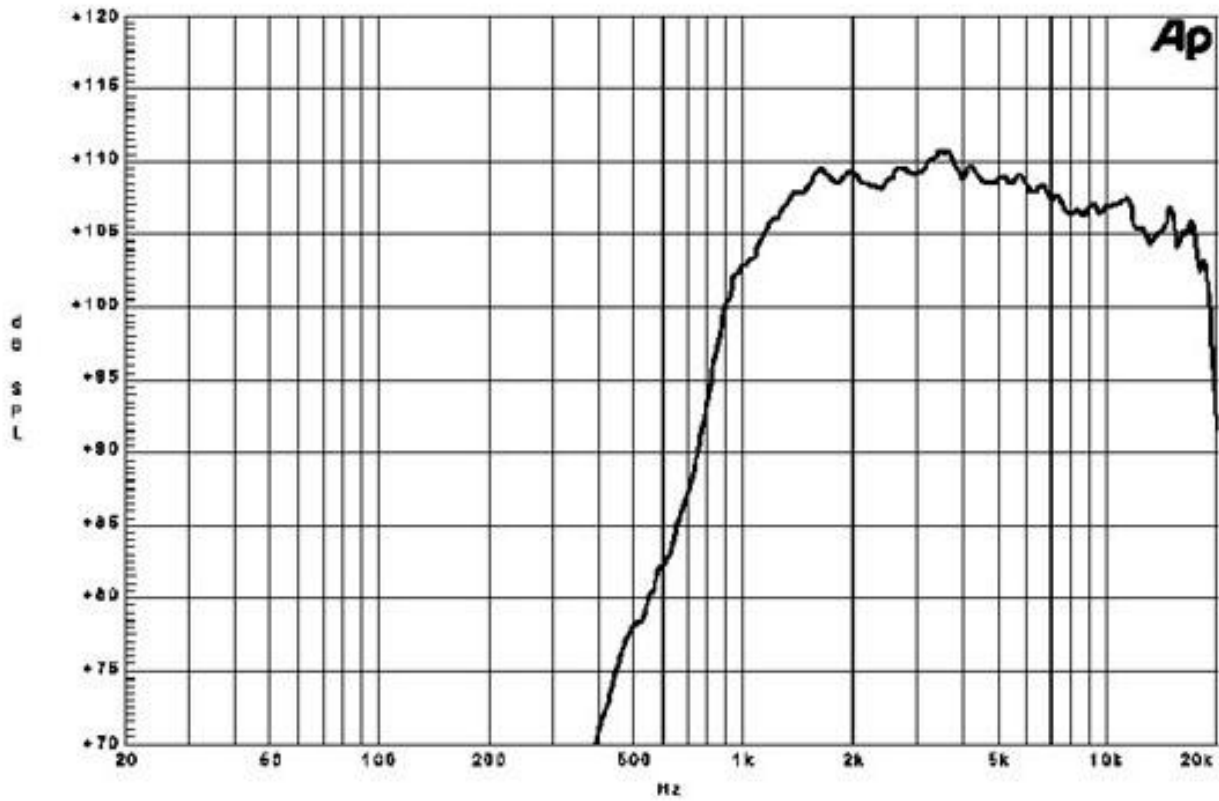

DE10 8 Ω

