

DE12TC 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

| | |
|--|-----------------------|
| Throat Diameter | 25 mm (1 in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 8.1 Ω |
| Nominal Power Handling | 30 W |
| 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. | |
| Continuous Power Handling | 60 W |
| Power on Continuous Program is defined as 3 dB greater than the Nominal rating. | |
| Sensitivity | 105 dB |
| Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance. | |
| Frequency Range | 2 kHz - 18 kHz |
| Recommended Crossover | 2.2 kHz |
| 12 dB/oct. or higher slope high-pass filter. | |
| Voice Coil Diameter | 36 mm (1.4 in) |
| Winding Material | Aluminium |
| Inductance | 0.14 mH |
| Flux Density | 1.45 T |
| Diaphragm Material | Titanium |

- 60 W continuous program power capacity
- 1" horn throat diameter
- 36 mm (1.4 in) aluminium voice coil
- Titanium diaphragm
- 1500 - 18000 Hz response
- 105 dB sensitivity

MOUNTING AND SHIPPING INFO

Two M5 holes 180° on 76 mm (3 in) diameter



| | |
|------------------|--|
| Overall Diameter | 90 mm (3.5 in) |
| Depth | 49 mm (2 in) |
| Net Weight | 1.05 kg (2.31 lb) |
| Shipping Units | 1 pcs |
| Shipping Weight | 1.08 kg (2.38 lb) |
| Shipping Box | 105x105x65 mm (4.13x4.13x2.56 in) |

SERVICE KITS

| | |
|--------------------------|-------------------|
| HF replacement-diaphragm | MMD012TN8B |
|--------------------------|-------------------|



DE12TC 8 Ω

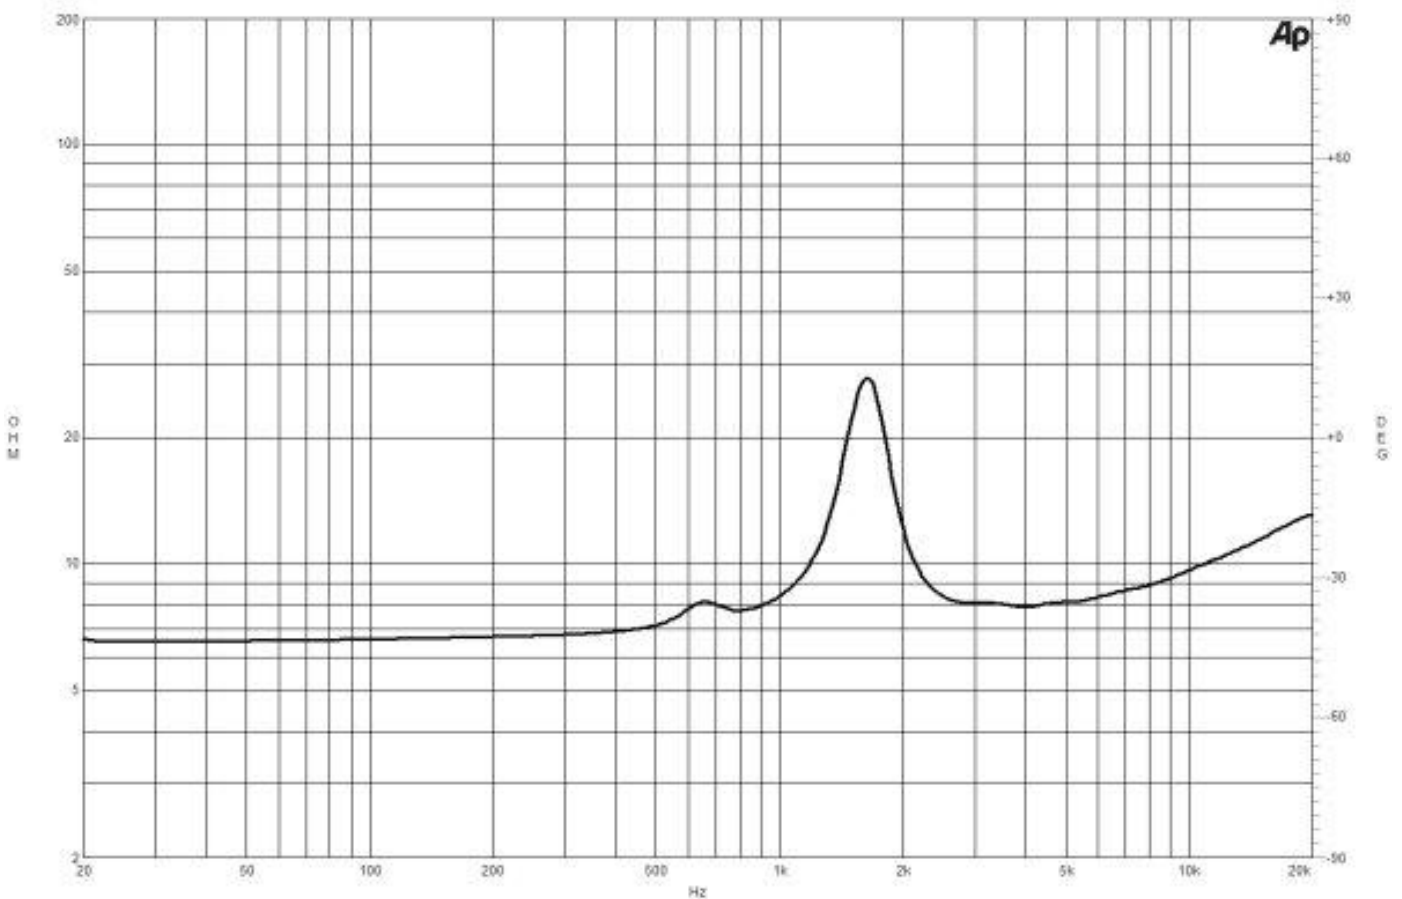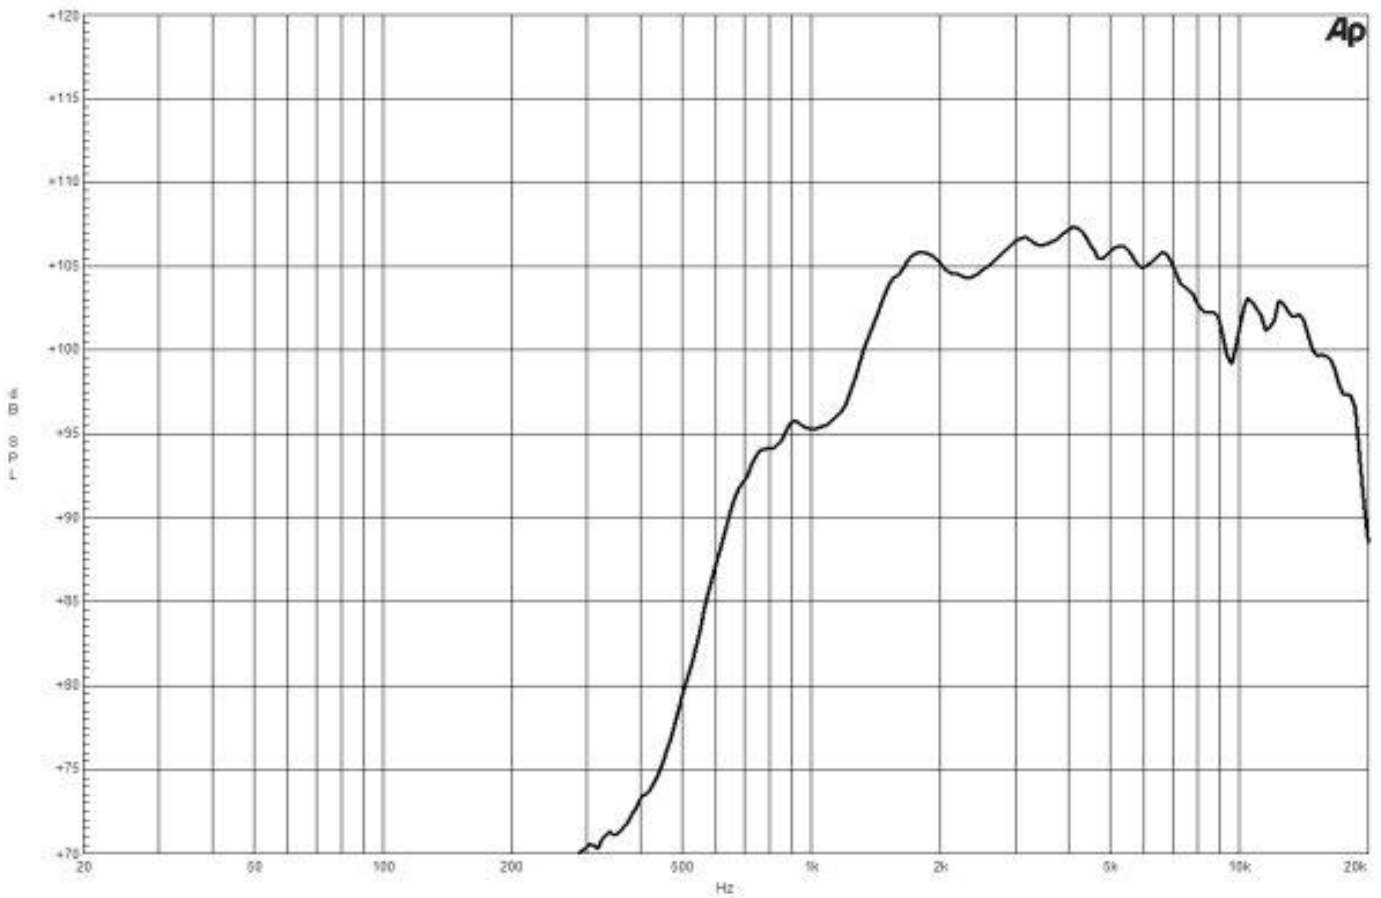

DE12TC 8 Ω

