

DE1095TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C LAB exponential horn.

Throat Diameter	50 mm (2 in)
Nominal Impedance	8 Ω
Minimum Impedance	8.3 Ω
Nominal Power Handling	120 W
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	240 W
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	108 dB
<small>Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.</small>	
Frequency Range	0.5 kHz - 20 kHz
Recommended Crossover	0.8 kHz
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	100 mm (4 in)
Winding Material	Aluminium
Inductance	0.18 mH
Flux Density	1.9 T
Diaphragm Material	Titanium

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	127 mm (5 in)
Depth	89 mm (3.5 in)
Net Weight	2.14 kg (4.71 lb)
Shipping Units	1 pcs
Shipping Weight	2.4 kg (5.28 lb)
Shipping Box	190x190x120 mm (7.48x7.48x4.72 in)

SERVICE KITS



HF replacement-diaphragm	MMD4CTN8M
--------------------------	------------------

- 2" horn throat diameter
- 240 W continuous program power capacity
- 100 mm (4 in) aluminium voice coil
- Titanium diaphragm
- 500 - 20000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

The DE1095TN is one of the latest versions of our premium 100mm (4.0 in) voice coil, neodymium high frequency driver. The diaphragm in this model has been completely redesigned to incorporate a bent edge voice coil former as well as new dome and surround geometry. These modifications combine to better control diaphragm displacement and deformations, resulting in lower distortion and a smoother higher frequency response above 10kHz.



DE1095TN 8 Ω

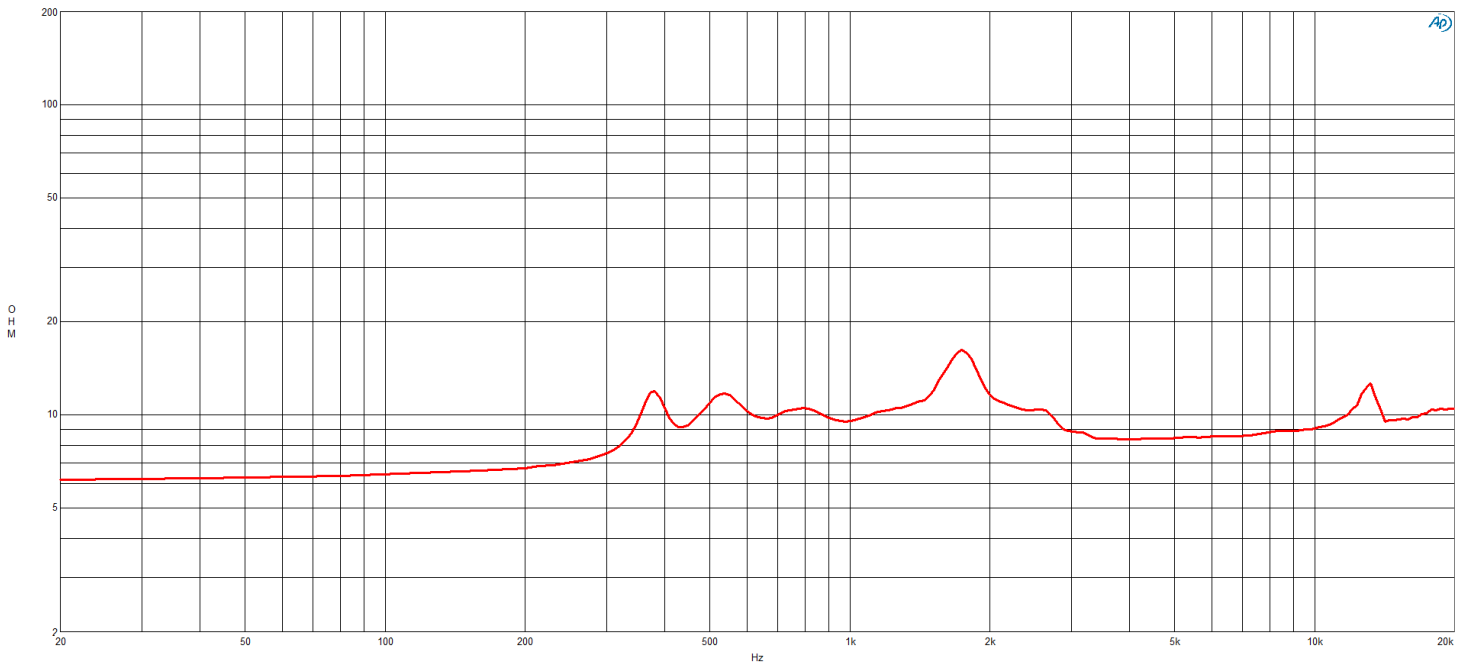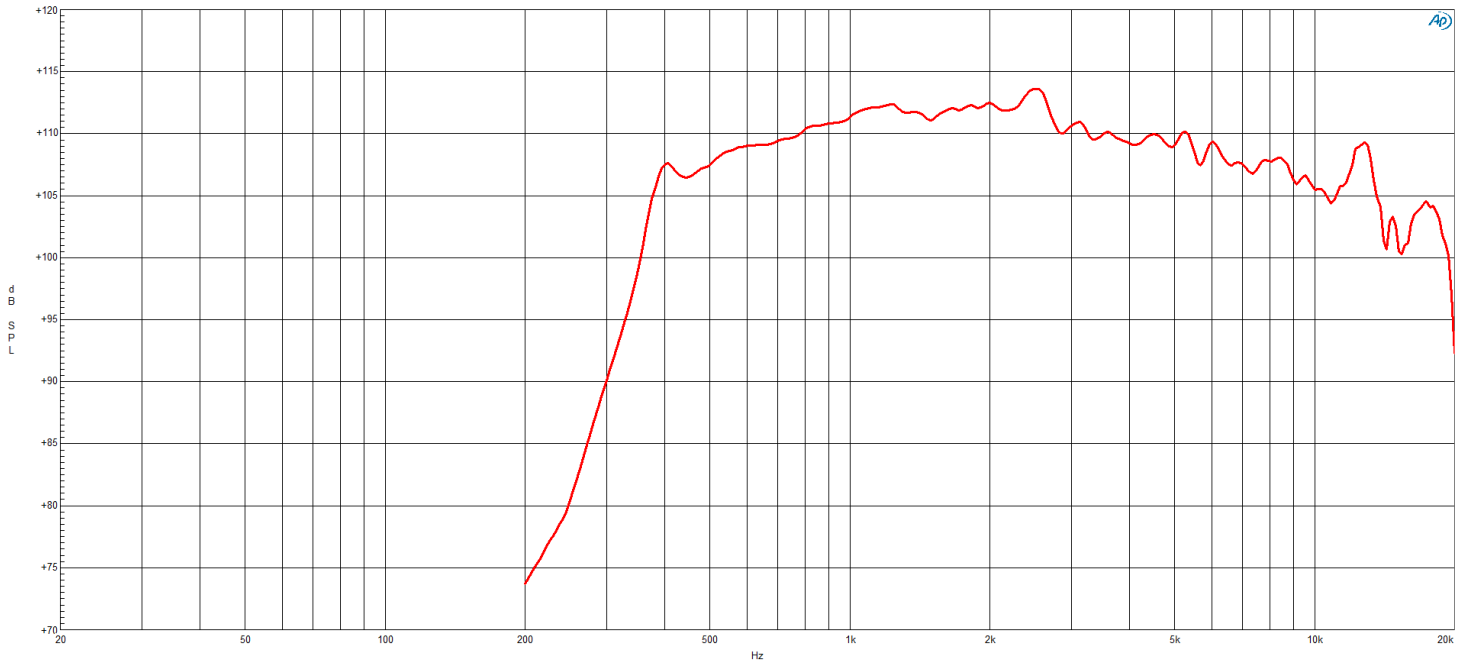

DE1095TN 8 Ω

