ME20

SPECIFICATIONS

Horn mounted on B&C DE 500 compression driver.

Throat Diameter	**25 mm (1 in)**
Nominal Coverage Horizontal	**90 °**
Nominal Coverage Vertical	**60 °**
Cutoff Frequency	**1.5 kHz**
Material	**Cast Aluminium**
Dimensions	**145x145x90 mm (5.7x5.7x3.6 in)**

MOUNTING AND SHIPPING INFO


Baffle Cutout Dimension	**118 mm (4.6 in)**
Air Volume Occupied by Driver	**0.1 dm^3**
Net Weight	**0.37 kg (0.81 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**0.38 kg (0.83 lb)**
Shipping Box	**165x165x100 mm (6.50x6.50x3.94 in)**




- 1" throat entry
- 90° x 60° nominal coverage
- Exponential flare
- Excellent loading down to 1.5 kHz

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com


ME20

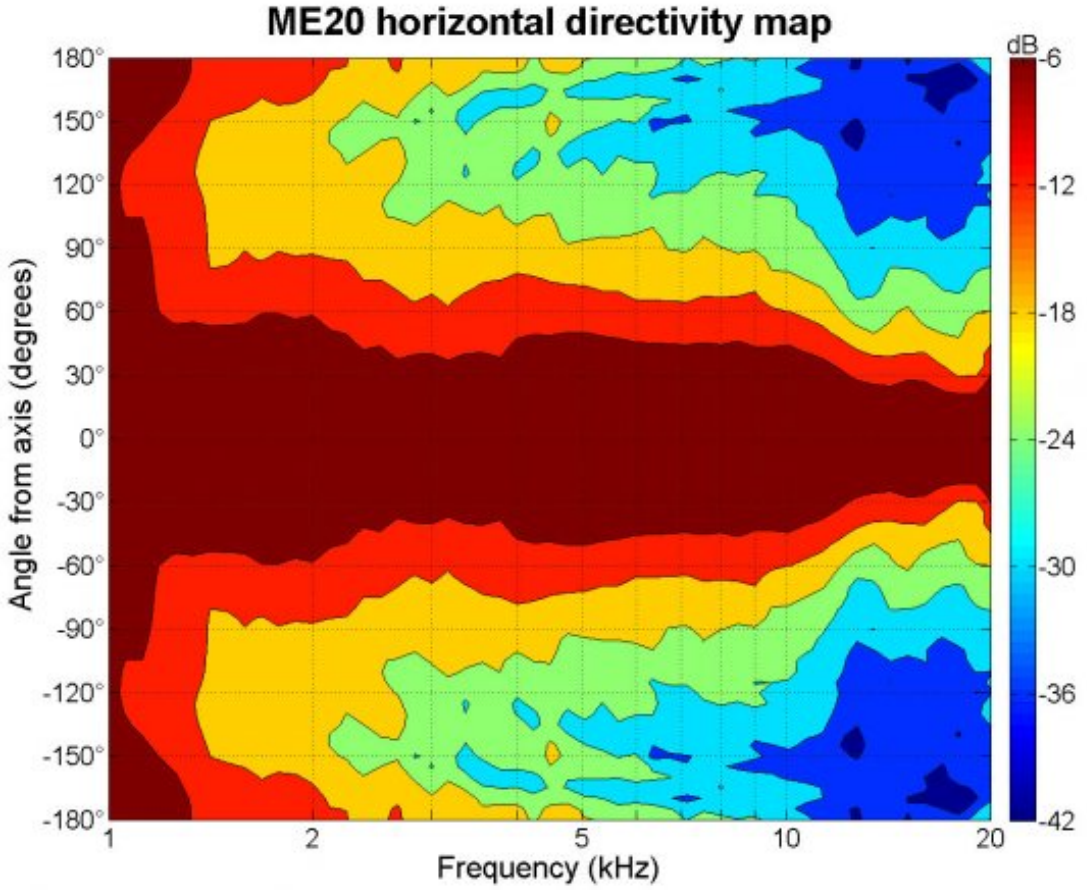

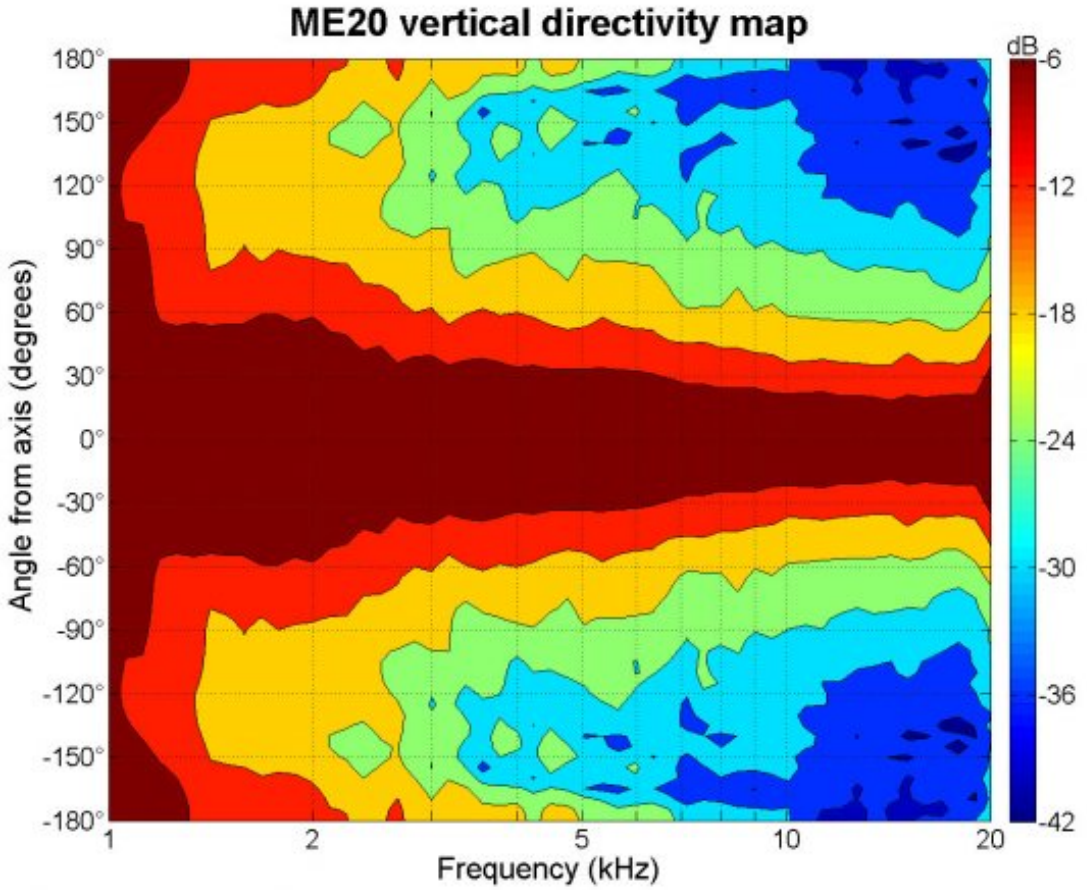


B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

ME20

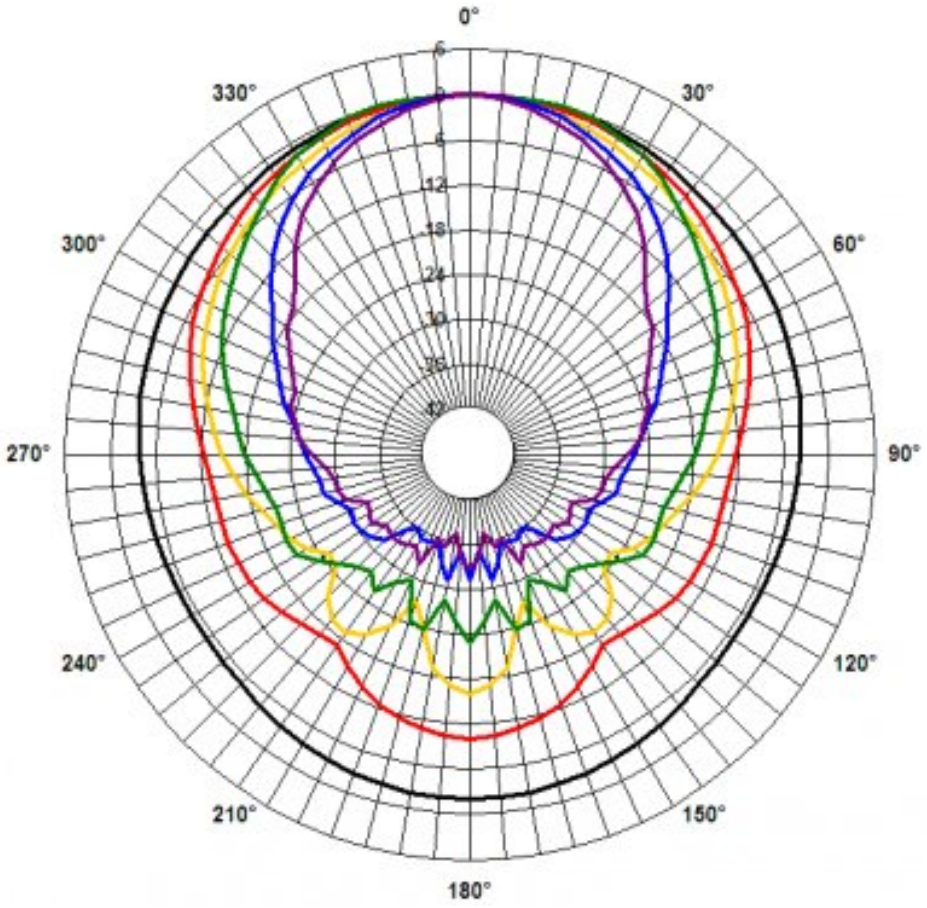

ME20 orizz.

- 1 kHz
- 2 kHz
- 4 kHz
- 8 kHz
- 12 kHz
- 16 kHz

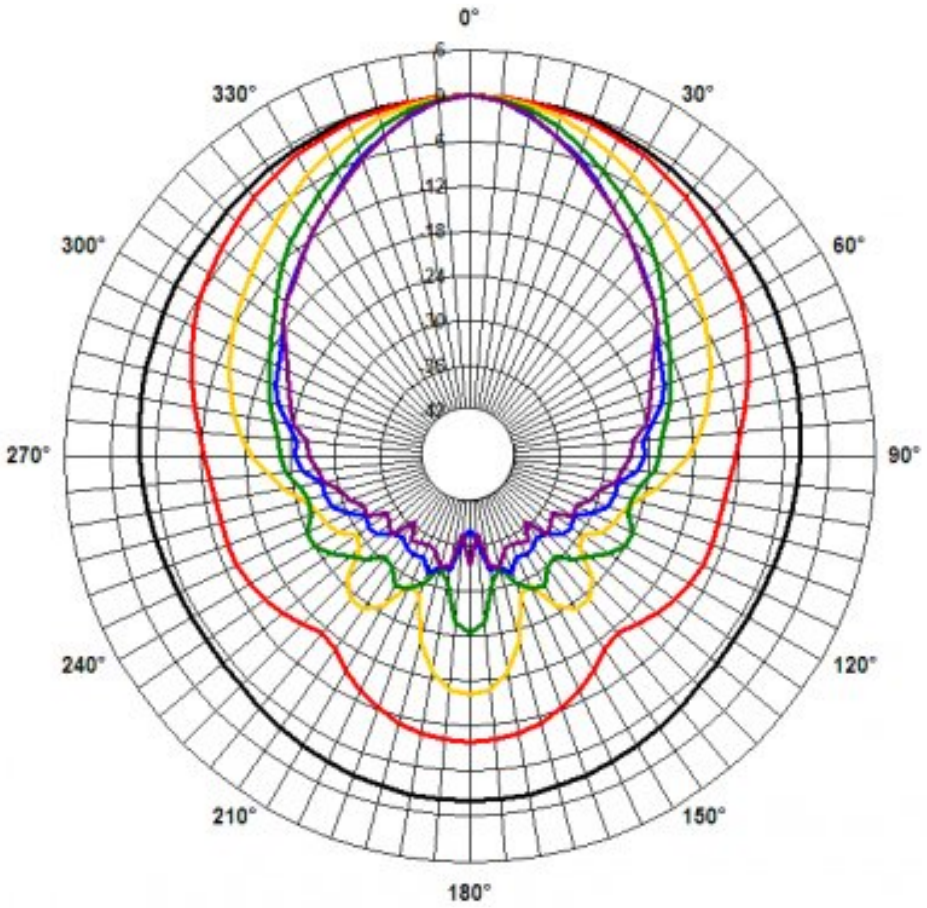

ME20 vert.

- 1 kHz
- 2 kHz
- 4 kHz
- 8 kHz
- 12 kHz
- 16 kHz

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

ME20

