

**15BG76** 8 Ω

Rubber Surround Subwoofer

- 1000 W continuous program power capacity
- 76 mm (3 in) copper voice coil
- 44 - 1000 Hz response
- 93.4 dB sensitivity
- Excursion optimized lead wires (woven through spider)
- FEA optimized Neodymium magnet assembly
- Aluminium demodulating ring for very low distortion
- Double silicone spider with optimized compliance



**15BG76 8 Ω**
**Rubber Surround Subwoofer**
**SPECIFICATIONS**

Nominal Diameter	<b>380 mm (15 in)</b>
Nominal Impedance	<b>8 Ω</b>
Minimum Impedance	<b>6.5 Ω</b>
Nominal Power Handling	<b>500 W</b>
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	<b>1000 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>93.4 dB</b>
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	<b>44 Hz - 1000 Hz</b>
Voice Coil Diameter	<b>76 mm (3 in)</b>
Winding Material	<b>Copper</b>
Former Material	<b>Glass Fibre</b>
Winding Depth	<b>25 mm (0.98 in)</b>
Magnetic Gap Depth	<b>11.5 mm (0.45 in)</b>
Flux Density	<b>1.22 T</b>
Woofers Cone Treatment	<b>TWP Waterproof Both Sides</b>

**PARAMETERS**

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	<b>44 Hz</b>
Re	<b>5.4 Ω</b>
Qes	<b>0.61</b>
Qms	<b>6.2</b>
Qts	<b>0.56</b>
Vas	<b>68.4 dm<sup>3</sup> (2.42 ft<sup>3</sup>)</b>
Sd	<b>855 cm<sup>2</sup> (132.53 in<sup>2</sup>)</b>
η <sub>0</sub>	<b>0.93 %</b>
X <sub>max</sub>	<b>9.6 mm</b>
X <sub>var</sub>	<b>12.5 mm</b>
M <sub>ms</sub>	<b>194 g</b>
Bl	<b>21.7 Tm</b>
Le	<b>1.29 mH</b>
EBP	<b>72 Hz</b>

**DESIGN**

Surround Shape	<b>Roll</b>
Cone Shape	<b>Radial</b>
Magnet Material	<b>Neodymium Ring</b>
Spider	<b>Double Silicone</b>
Pole Design	<b>T-Pole</b>
Woofers Cone Treatment	<b>TWP Waterproof Both Sides</b>
Recommended Enclosure	<b>160 dm<sup>3</sup> (5.65 ft<sup>3</sup>)</b>
Recommended Tuning	<b>34 Hz</b>

**MOUNTING AND SHIPPING INFO**



Overall Diameter	<b>393 mm (15.47 in)</b>
Bolt Circle Diameter	<b>374 mm (14.7 in)</b>
Baffle Cutout Diameter	<b>354 mm (13.9 in)</b>
Depth	<b>190 mm (7.48 in)</b>
Flange and Gasket Thickness	<b>23 mm (0.91 in)</b>
Air Volume Occupied by Driver	<b>6 dm<sup>3</sup> (0.21 ft<sup>3</sup>)</b>
Net Weight	<b>5.95 kg (13.12 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>7.25 kg (15.98 lb)</b>
Shipping Box	<b>425x425x224 mm (16.73x16.73x8.82 in)</b>


**SERVICE KITS**

LF recone-kits	<b>RCK15BG768</b>
----------------	-------------------

**15BG76 8 Ω**

**Rubber Surround Subwoofer**

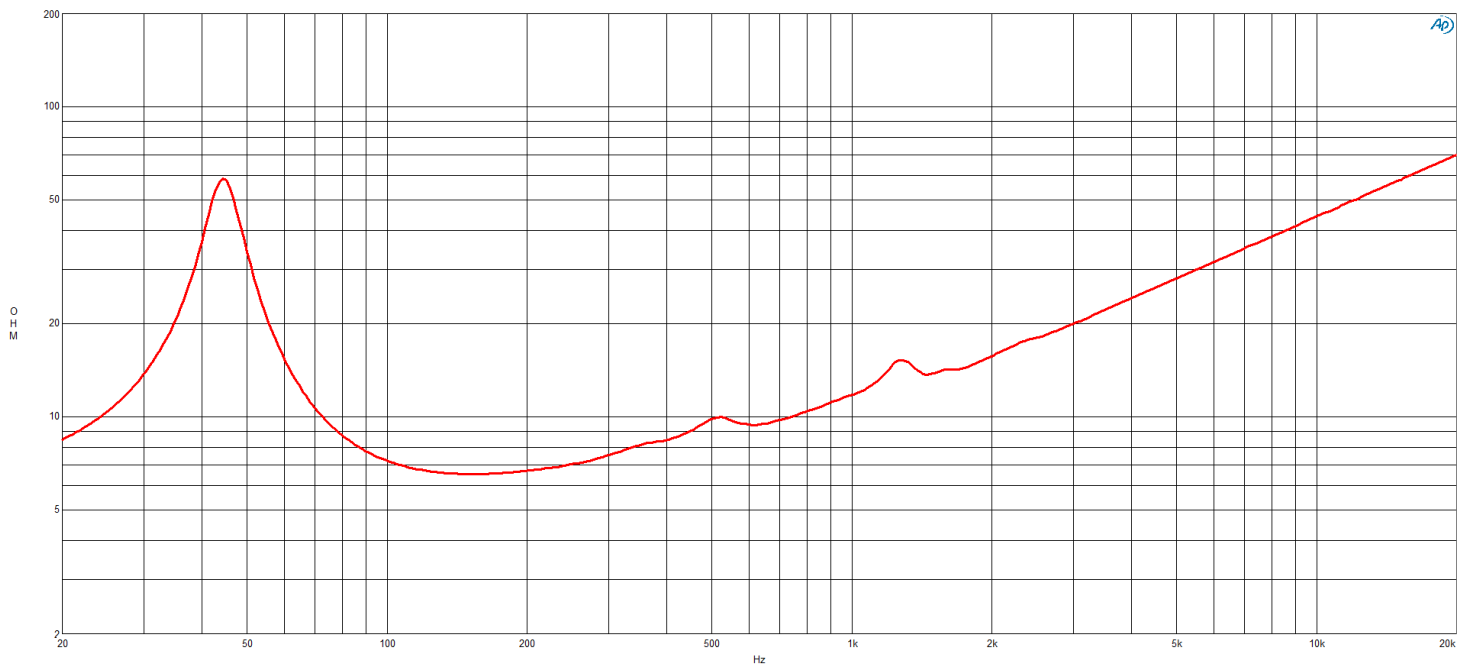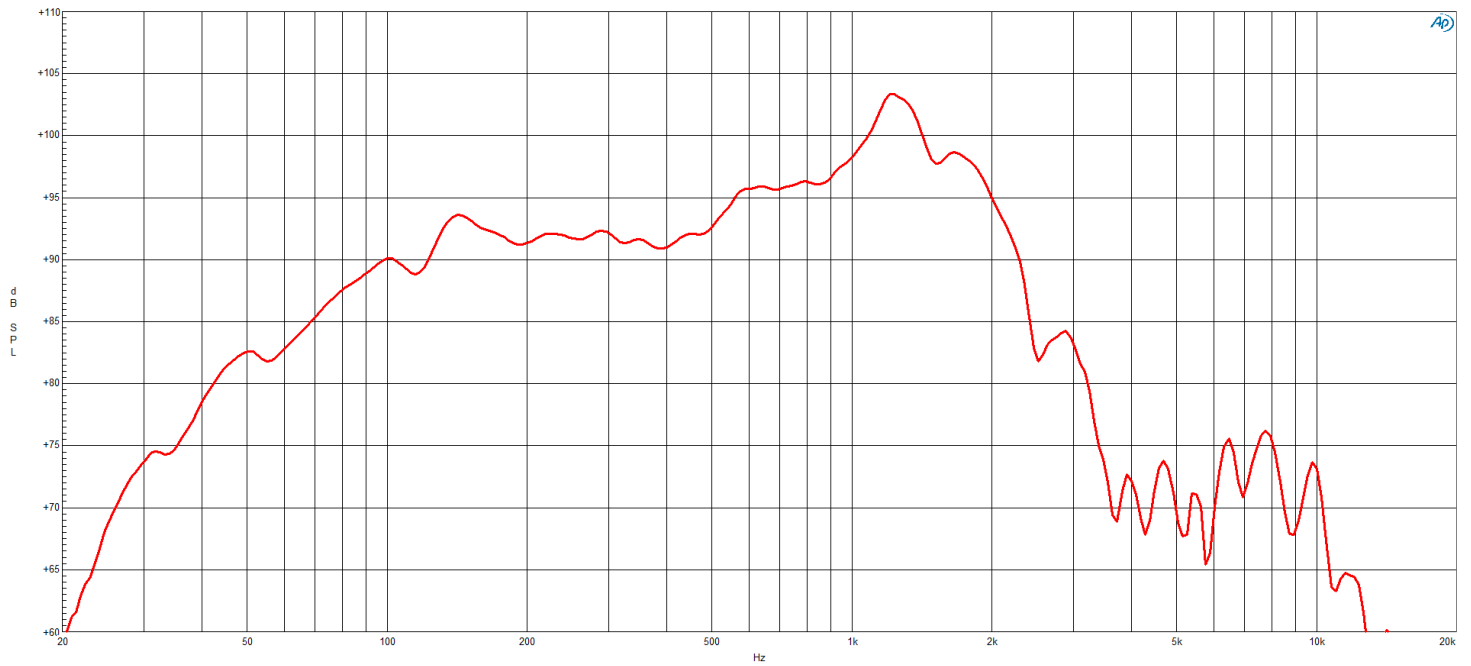

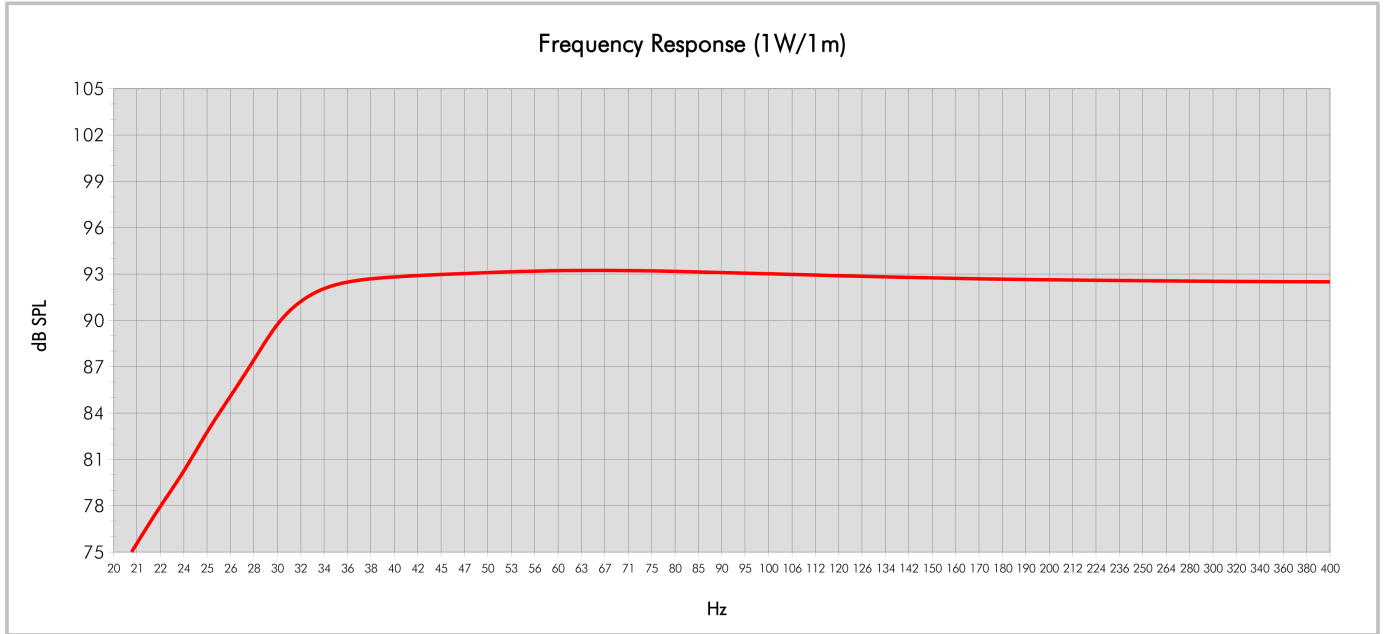

Model:	<b>15BG76</b>	Configuration:	<b>One Driver</b>
Enclosure Type:	<b>Bass Reflex</b>		
Internal Net Volume (Litres):	<b>160</b>	QB:	<b>7</b>
Tuning Frequency (Hz):	<b>34</b>	Port Area (cm <sup>2</sup> ):	<b>222,0</b>
Frequency (-3 dB) (Hz):	<b>29,8</b>	Port Length (cm):	<b>21,4</b>
Frequency (-10 dB) (Hz):	<b>24,8</b>		

**15BG76** 8 Ω

Rubber Surround Subwoofer

