

**21DS115** 4 Ω**Subwoofer**

- 3400 W continuous program power capacity
- 116 mm (4.5 in) four layer aluminum voice coil
- 30 - 500 Hz response
- 100 dB sensitivity
- Excursion optimized lead wires (woven through spider)
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression
- Aluminium demodulating ring for very low distortion

This next evolution subwoofer uses a new, longer, four layer aluminum voice coil. The result is more energy in the gap, less heat, higher sensitivity, higher power handling, lower distortion and better overall performance. The 21DS115 features a 36 mm long, 4.5 inch diameter (116mm) Copper Clad Aluminum Wire voice coil. With a 1700watt AES power rating, 100 dB sensitivity, and 15 mm of Xmax, this high energy subwoofer is a significant step forward from similar models in the B&C range, even approaching the performance of our 6" voice coil alternatives.



**21DS115 4 Ω**
**Subwoofer**
**SPECIFICATIONS**

Nominal Diameter	<b>530 mm (21 in)</b>
Nominal Impedance	<b>4 Ω</b>
Minimum Impedance	<b>3.1 Ω</b>
Nominal Power Handling	<b>1700 W</b>
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	<b>3400 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>100 dB</b>
Applied RMS Voltage is set to 2 V for 4 ohms Nominal Impedance.	
Frequency Range	<b>30 Hz - 500 Hz</b>
Voice Coil Diameter	<b>116 mm (4.5 in)</b>
Winding Material	<b>Aluminium</b>
Former Material	<b>Glass Fibre</b>
Winding Depth	<b>36 mm (1.42 in)</b>
Magnetic Gap Depth	<b>14 mm (0.55 in)</b>
Flux Density	<b>0.8 T</b>
Woofer Cone Treatment	<b>TWP Waterproof Both Sides</b>

**PARAMETERS**

\*\* Update March 2026 \*\*

Fs	<b>32 Hz</b>
Re	<b>2.1 Ω</b>
Qes	<b>0.22</b>
Qms	<b>9.8</b>
Qts	<b>0.21</b>
Vas	<b>219 dm<sup>3</sup> (7.73 ft<sup>3</sup>)</b>
Sd	<b>1620 cm<sup>2</sup> (251.1 in<sup>2</sup>)</b>
η <sub>0</sub>	<b>3.3 %</b>
X <sub>max</sub>	<b>15 mm</b>
X <sub>var</sub>	<b>11.5 mm</b>
M <sub>ms</sub>	<b>409 g</b>
Bl	<b>28.6 Tm</b>
Le	<b>2.3 mH</b>
EBP	<b>145 Hz</b>

**DESIGN**

Surround Shape	<b>Triple Roll</b>
Cone Shape	<b>Radial</b>
Magnet Material	<b>Neodymium Inside Slug</b>
Spider	<b>Double Silicone</b>
Pole Design	<b>T-Pole</b>
Woofer Cone Treatment	<b>TWP Waterproof Both Sides</b>
Recommended Enclosure	<b>130 dm<sup>3</sup> (4.59 ft<sup>3</sup>)</b>
Recommended Tuning	<b>40 Hz</b>

**MOUNTING AND SHIPPING INFO**



Overall Diameter	<b>547 mm (21.54 in)</b>
Bolt Circle Diameter	<b>527 mm (20.7 in)</b>
Baffle Cutout Diameter	<b>508 mm (20 in)</b>
Depth	<b>255 mm (10.04 in)</b>
Flange and Gasket Thickness	<b>13 mm (0.51 in)</b>
Air Volume Occupied by Driver	<b>15 dm<sup>3</sup> (0.53 ft<sup>3</sup>)</b>
Net Weight	<b>14.7 kg (32.41 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>17 kg (37.48 lb)</b>
Shipping Box	<b>570x570x320 mm (22.44x22.44x12.60 in)</b>


**SERVICE KITS**

LF recone-kits	<b>RCK21DS1154</b>
----------------	--------------------

**21DS115** 4 Ω

**Subwoofer**

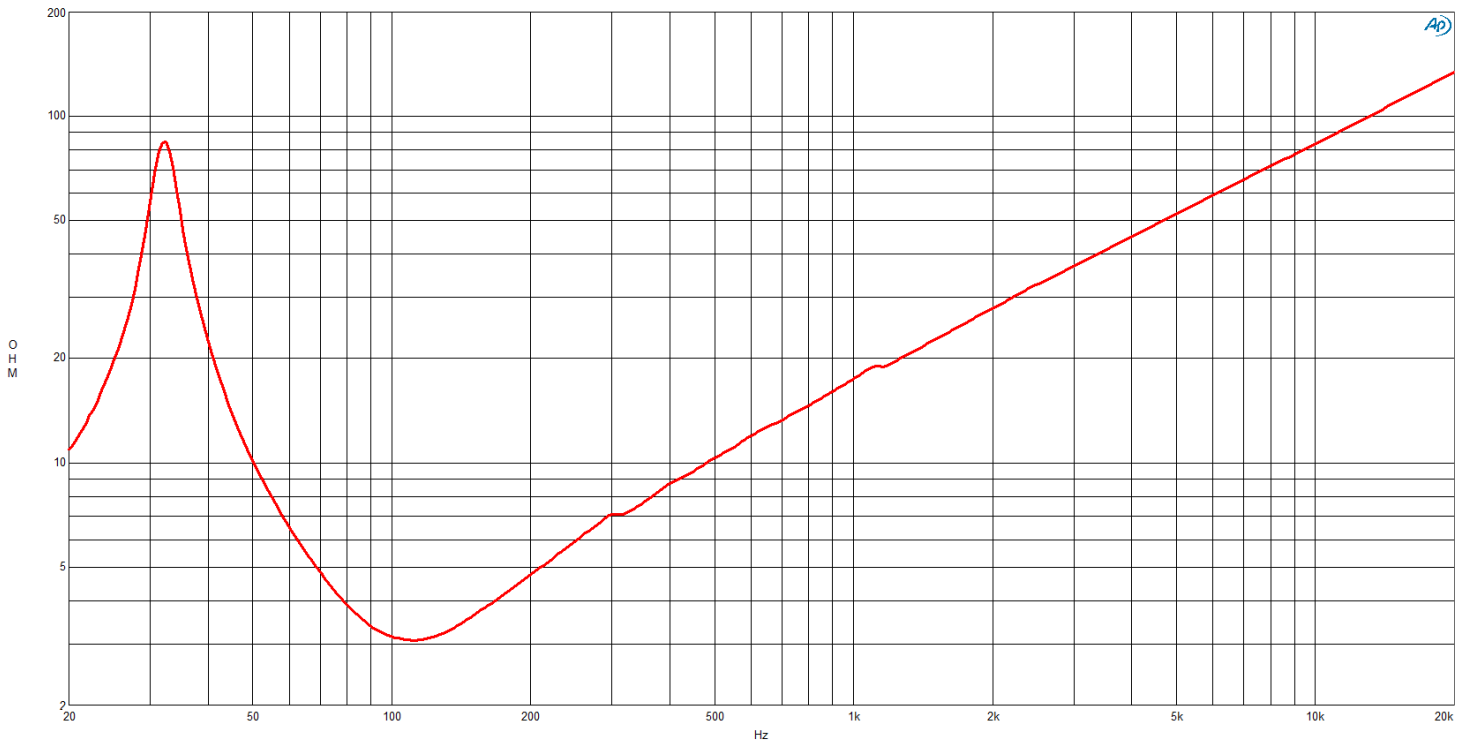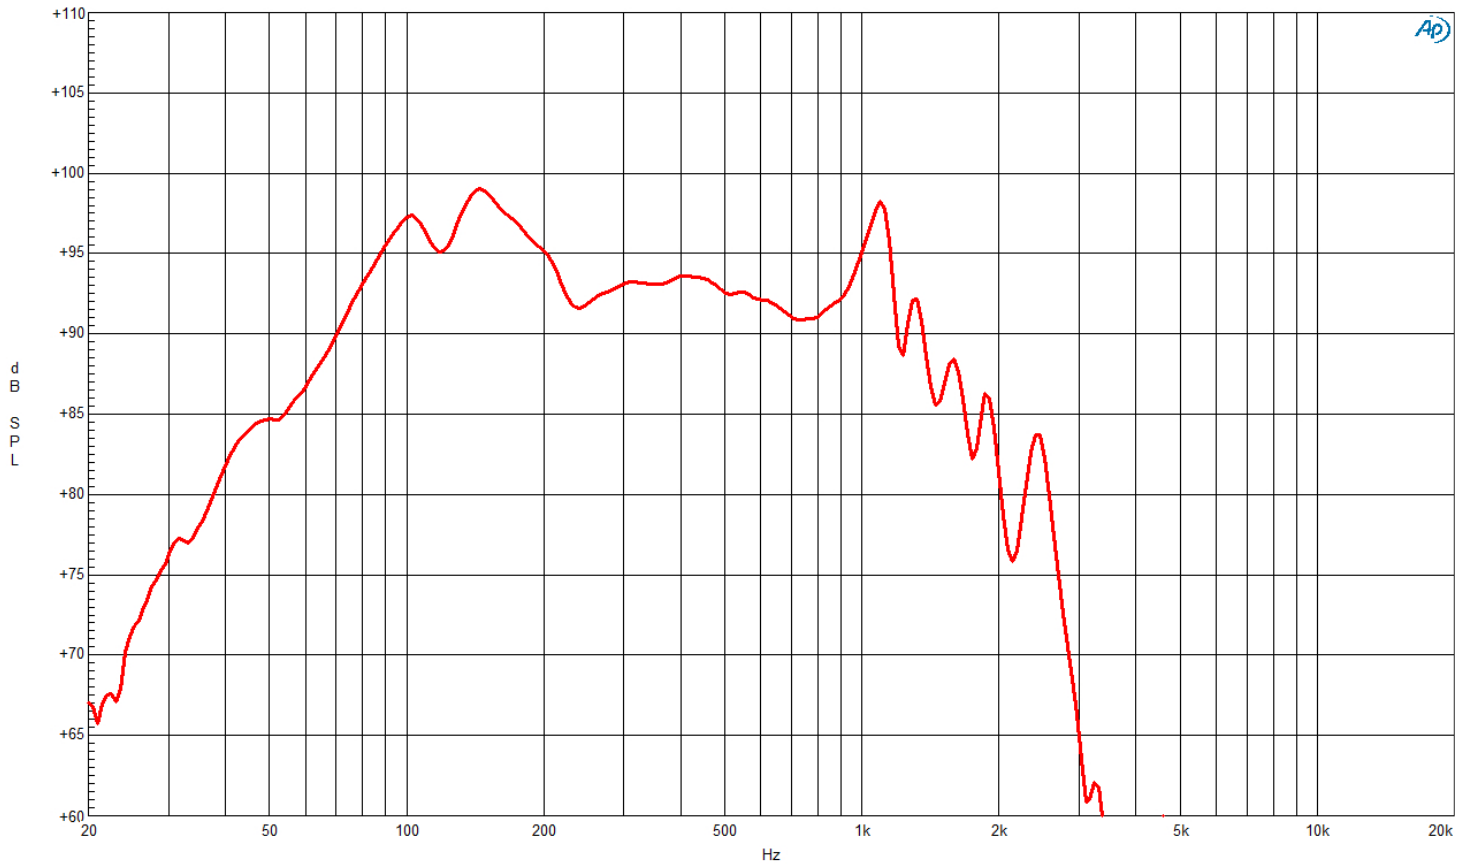

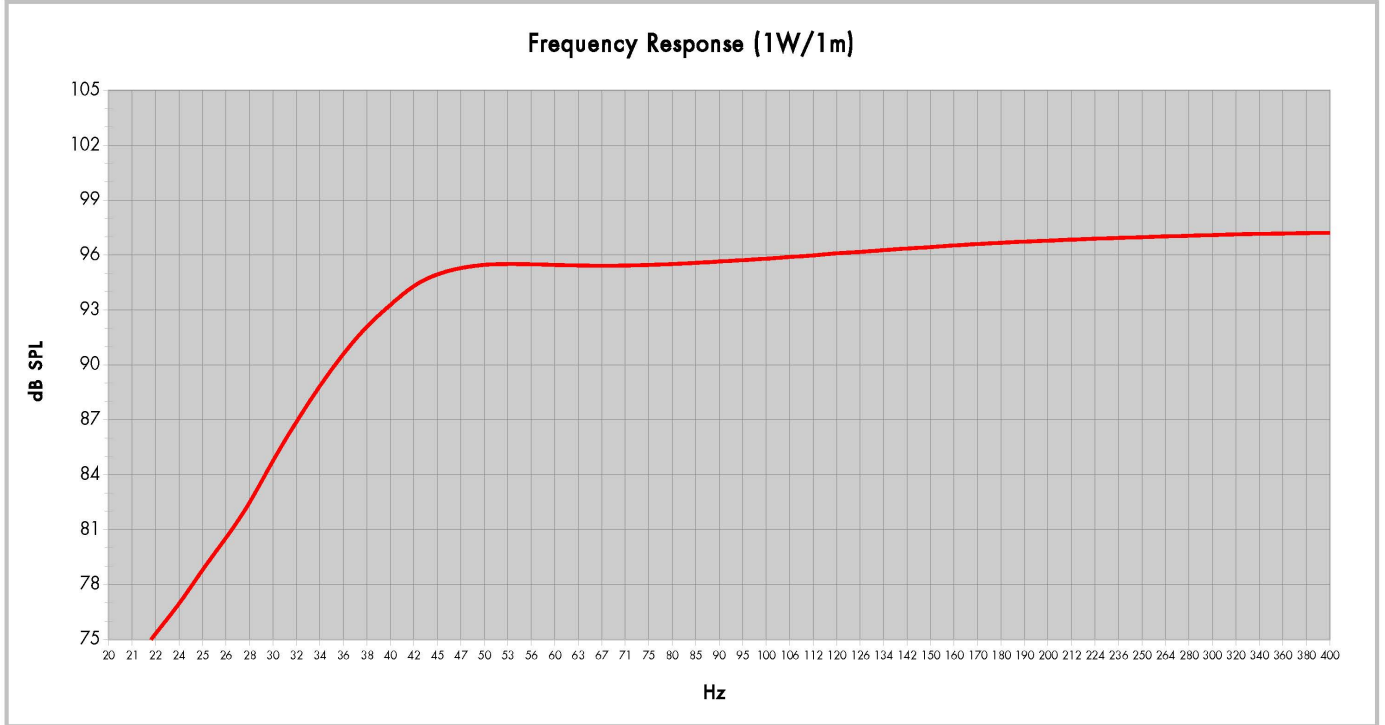

Model:	<b>21DS115</b>	Configuration:	<b>One Driver</b>
Enclosure Type:	<b>Bass Reflex</b>		
Internal Net Volume (Litres):	<b>130</b>	QB:	<b>7</b>
Tuning Frequency (Hz):	<b>40</b>	Port Area (cm <sup>2</sup> ):	<b>333,0</b>
Frequency (-3 dB) (Hz):	<b>42,7</b>	Port Length (cm):	<b>30,2</b>
Frequency (-10 dB) (Hz):	<b>32,5</b>		

**21DS115** 4 Ω

**Subwoofer**

