

DE35 8 Ω**SPECIFICATIONS**

Nominal Impedance	8 Ω
Minimum Impedance	7 Ω
Nominal Power Handling	25 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	50 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	108 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	3.5 kHz - 18 kHz
Recommended Crossover	5 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	32 mm (1.25 in)
Winding Material	Aluminium
Inductance	0.1 mH
Flux Density	1.3 T
Diaphragm Material	Polyester

- 50 W continuous program power capacity
- 3500 - 18000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly

MOUNTING AND SHIPPING INFO



Overall Diameter	100 mm (4 in)
Depth	46 mm (1.8 in)
Net Weight	0.55 kg (1.21 lb)
Shipping Units	1 pcs
Shipping Weight	0.58 kg (1.28 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)

SERVICE KITS


HF replacement-diaphragm	MMD0358
--------------------------	----------------



DE35 8 Ω

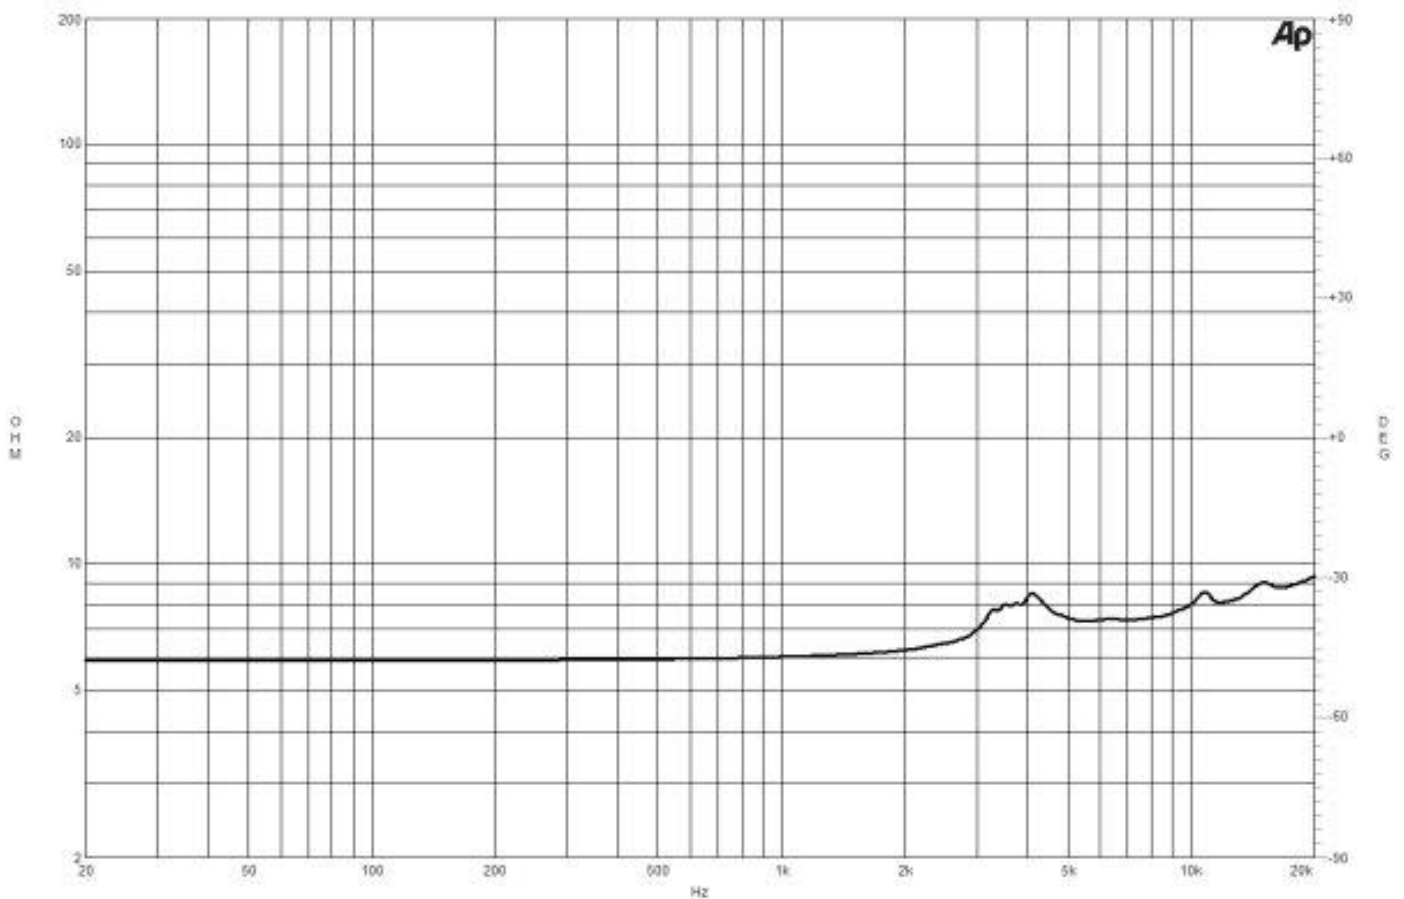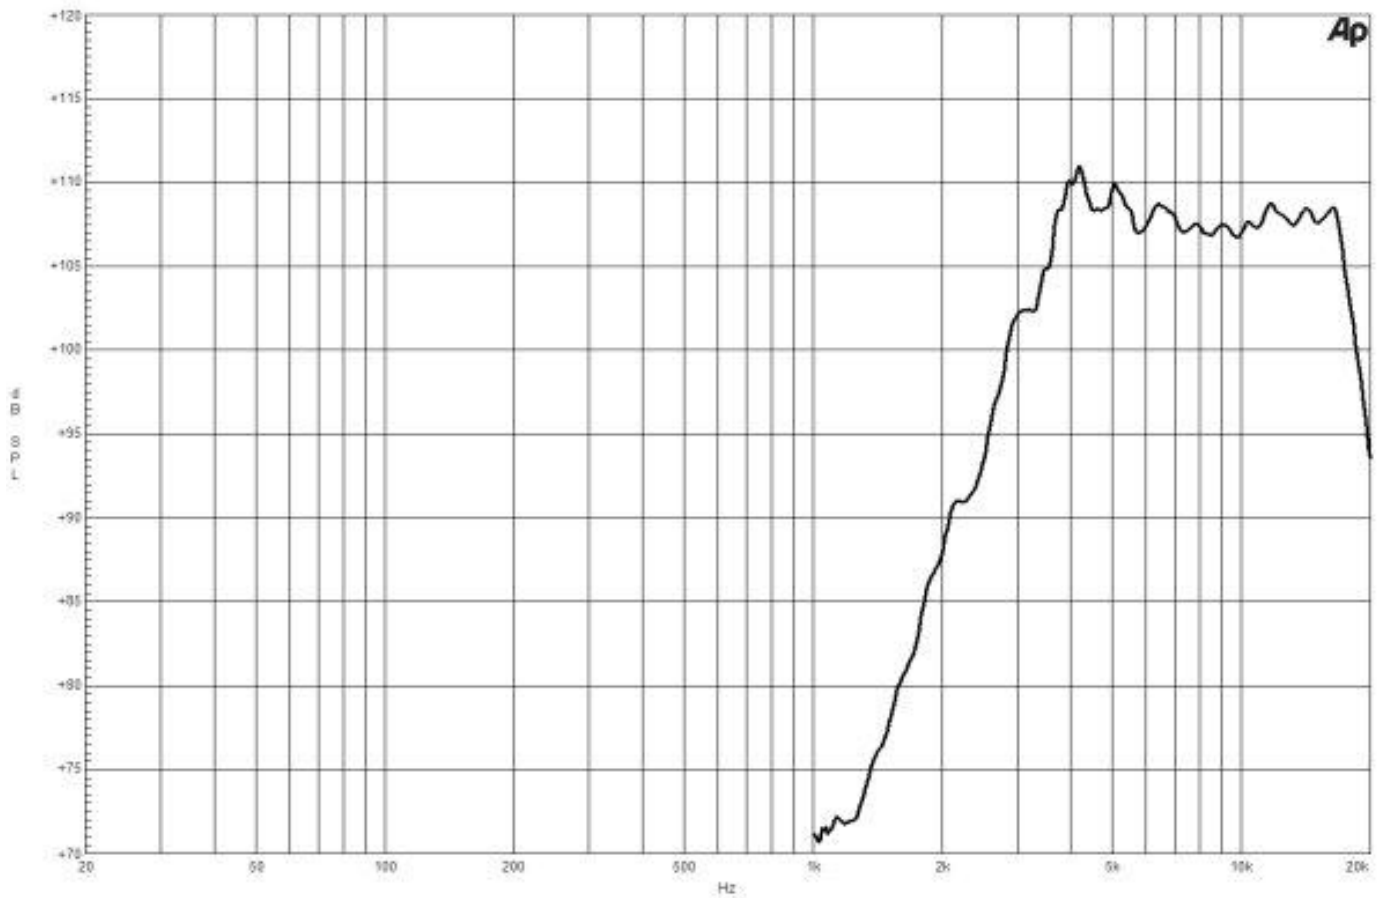

DE35 8 Ω

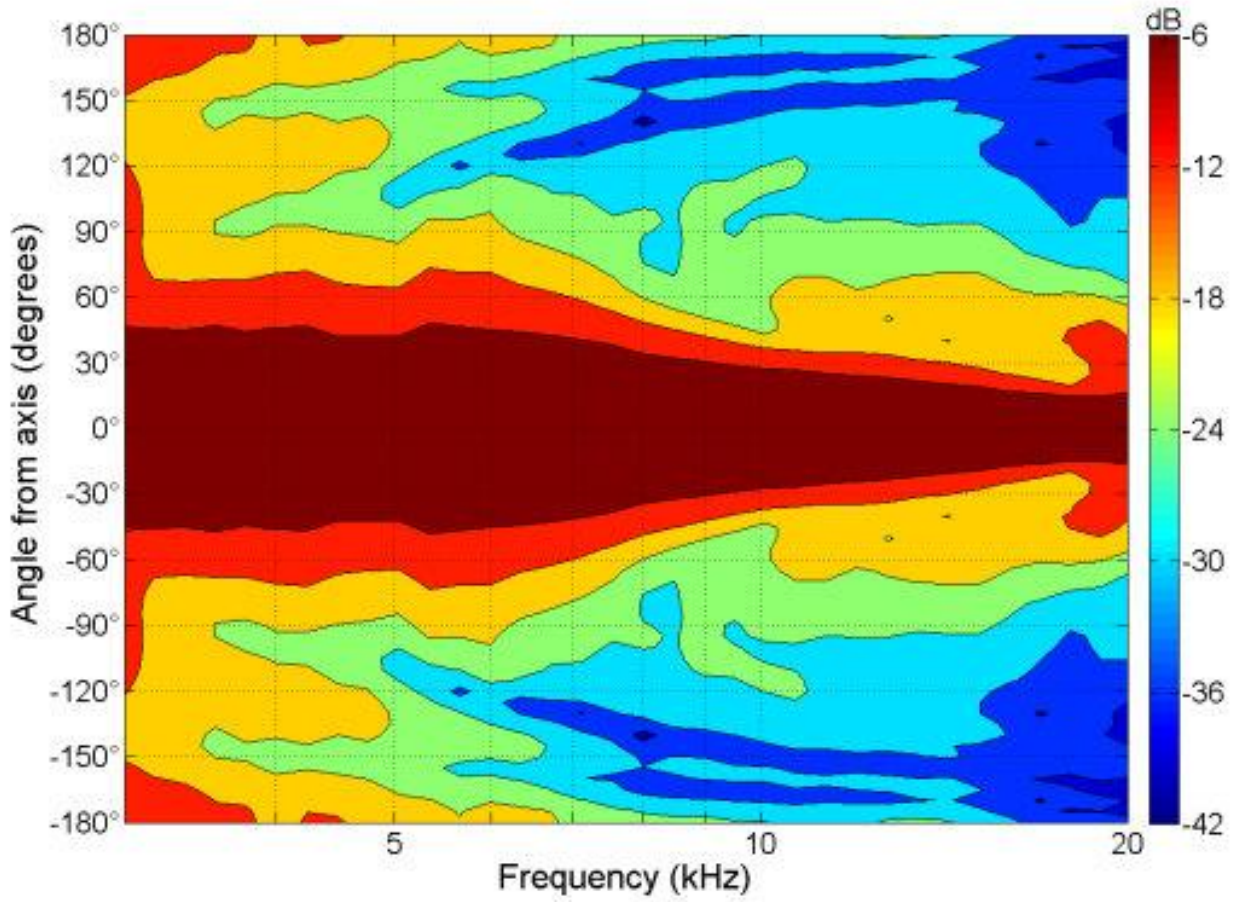

DE35 8 Ω

