


- 160 W continuous program power capacity
- 2' horn throat diameter
- 400 - 16000 Hz response
- 108.5 dB sensitivity
- Neodymium magnet assembly
- Time coherent coaxial design

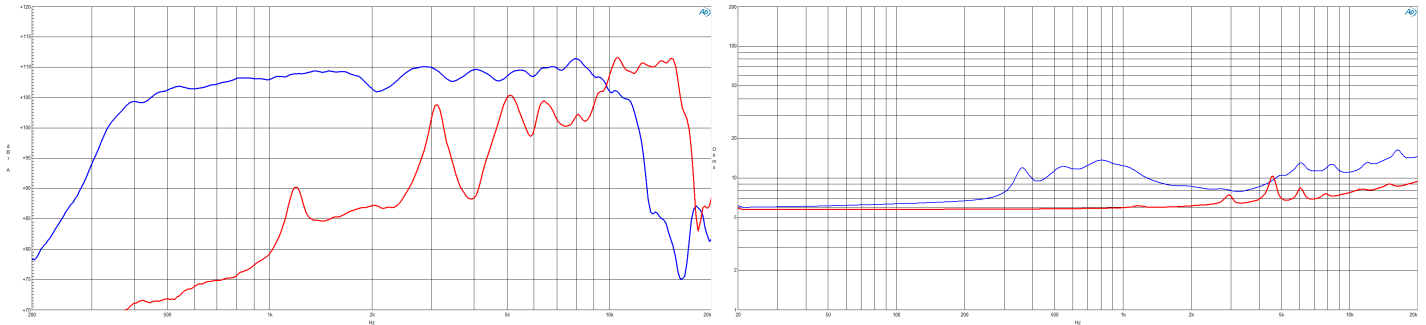

SPECIFICATIONS MF UNIT

| | |
|---------------------------|--|
| Throat Diameter | 50 mm (2 in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 8 Ω |
| Nominal Power Handling | 80 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 10 kHz. Power calculated on rated minimum impedance. |
| Continuous Power Handling | 160 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating. |
| Sensitivity | 108.5 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance. |
| Frequency Range | 0.4 kHz - 10 kHz |
| Recommended Crossover | 0.4 kHz 12 dB/oct. or higher slope high-pass filter. |
| Voice Coil Diameter | 51 mm (2 in) |
| Winding Material | Aluminium |
| Inductance | 0.3 mH |
| Flux Density | 2 T |
| Diaphragm Material | Composite |

SERVICE KITS

| | |
|--------------------------|-----------|
| HF replacement-diaphragm | MMDTWDCX8 |
| MF replacement-diaphragm | MMDDCX08 |

SPECIFICATIONS HF UNIT

Driver mounted on 320 Hz exponential horn.

| | |
|---------------------------|--|
| Throat Diameter | 50 mm (2 in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 7 Ω |
| Nominal Power Handling | 20 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. |
| Continuous Power Handling | 40 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating. |
| Sensitivity | 108.5 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance. |
| Frequency Range | 10 kHz - 16 kHz |
| Recommended Crossover | 10 kHz 12 dB/oct. or higher slope high-pass filter. |
| Voice Coil Diameter | 32 mm (1.2 in) |
| Winding Material | Aluminium |
| Inductance | 0.11 mH |
| Flux Density | 2 T |
| Diaphragm Material | Polyester |

MOUNTING AND SHIPPING INFO

| | |
|------------------|---------------------------------------|
| Overall Diameter | 152 mm (6 in) |
| Depth | 108 mm (4.25 in) |
| Net Weight | 3.39 kg (7.47 lb) |
| Shipping Units | 1 pcs |
| Shipping Weight | 3.59 kg (7.91 lb) |
| Shipping Box | 170x170x140 mm (6.69x6.69x5.51 in) |