


- 220 W continuous program power capacity
- 1.4" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- Titanium diaphragm
- 500 - 18000 Hz response
- 108 dB sensitivity
- Shorting copper cap for extended HF response

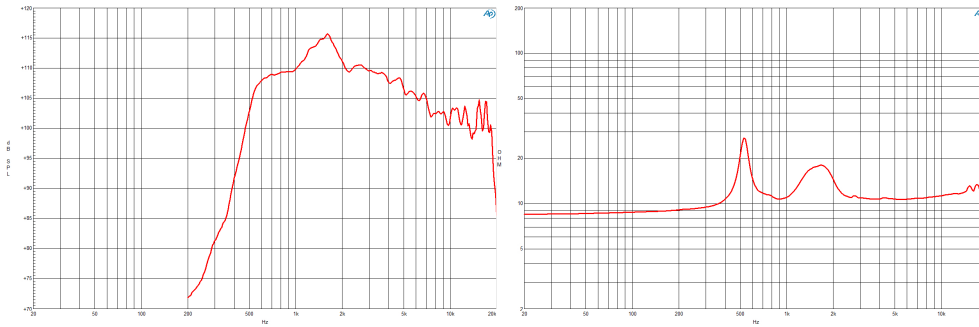

## SPECIFICATIONS

Driver mounted on B&C ME90 horn.

|                           |   |
|---------------------------|---|
| Throat Diameter           | 36 mm (1.4 in)  |
| Nominal Impedance         | 16 $\Omega$   |
| Minimum Impedance         | 10.7 $\Omega$   |
| Nominal Power Handling    | 110 W<br>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. |
| Continuous Power Handling | 220 W<br>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.  |
| Sensitivity               | 108 dB<br>Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.  |
| Frequency Range           | 0.5 kHz - 18 kHz  |
| Recommended Crossover     | 1 kHz<br>12 dB/oct. or higher slope high-pass filter.   |
| Voice Coil Diameter       | 75 mm (3 in)  |
| Winding Material          | Aluminium   |
| Inductance                | 0.14 mH   |
| Flux Density              | 1.8 T   |
| Diaphragm Material        | Titanium  |

## SERVICE KITS

|                          |            |
|--------------------------|------------|
| HF replacement-diaphragm | MMD3DTN16M |
|--------------------------|------------|

## MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

|                  |                                      |
|------------------|--------------------------------------|
| Overall Diameter | 170 mm (6.7 in)                      |
| Depth            | 65 mm (2.5 in)                       |
| Net Weight       | 4.4 kg (9.7 lb)                      |
| Shipping Units   | 1 pcs                                |
| Shipping Weight  | 4.52 kg (9.96 lb)                    |
| Shipping Box     | 190x190x80 mm<br>(7.48x7.48x3.15 in) |