
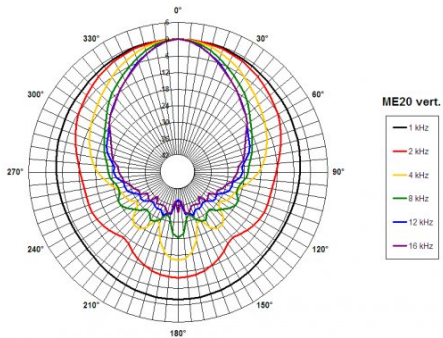
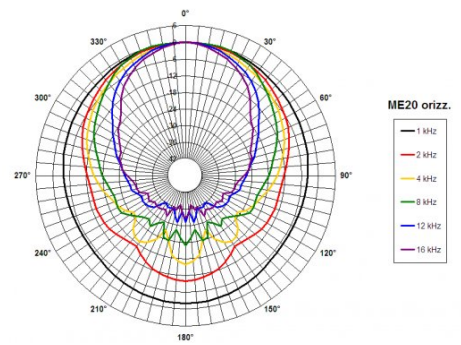
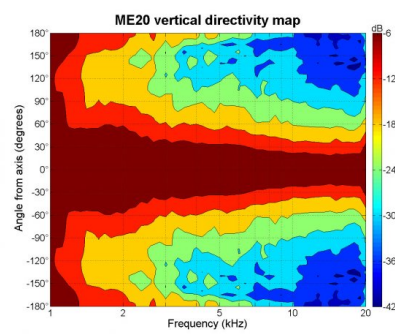


- 1" throat entry
- 90° x 60° nominal coverage
- Exponential flare
- Excellent loading down to 1.5 kHz

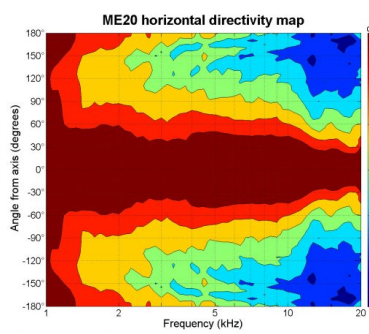

**SPECIFICATIONS**

Horn mounted on B&amp;C DE 500 compression driver.

Throat Diameter	25 mm (1 in)
-----------------	--------------

Nominal Coverage Horizontal	90 °
-----------------------------	------

Nominal Coverage Vertical	60 °
---------------------------	------

Cutoff Frequency	1.5 kHz
------------------	---------

Material	Cast Aluminium
----------	----------------

Dimensions	145x145x90 mm (5.7x5.7x3.6 in)
------------	-----------------------------------

**MOUNTING AND SHIPPING INFO**

Other details	2x 6.3 mm (0.25 in) holes 180° on 76 mm (3 in) diameter --- 2x 5.1 mm (0.2 in) holes 180° on 57 mm (2.24 in) diameter
---------------	--

Baffle Cutout Dimension	118 mm (4.6 in)
-------------------------	-----------------

Air Volume Occupied by Driver	0.1 dm <sup>3</sup>
-------------------------------	---------------------

Net Weight	0.37 kg (0.81 lb)
------------	-------------------

Shipping Units	1 pcs
----------------	-------

Shipping Weight	0.38 kg (0.83 lb)
-----------------	-------------------

Shipping Box	165x165x100 mm (6.50x6.50x3.94 in)
--------------	---------------------------------------