FBCXN36 8 Ω

SPECIFICATIONS

Nominal Impedance	**8 Ω**
Crossover Frequency	**1 kHz**
Filter Type	**Two Way**
Slope	**12 - 6 dB/oct**
Overall Dimensions	**100x76 mm (3.94x2.99 in)**

MOUNTING AND SHIPPING INFO


Net Weight	**0.22 kg (0.49 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**0.25 kg (0.54 lb)**
Shipping Box	**120x125x35 mm (4.72x4.92x1.38 in)**


POTENTIAL APP. COAXIALS

4CXN36	**8Ω**
5CXN36	**8Ω**
6CXN36	**8Ω**


Dedicated crossover network for 4CXN36, 5CXN36 and 6CXN36 Coaxials.


8 Ω low-pass section
16 Ω high-pass section

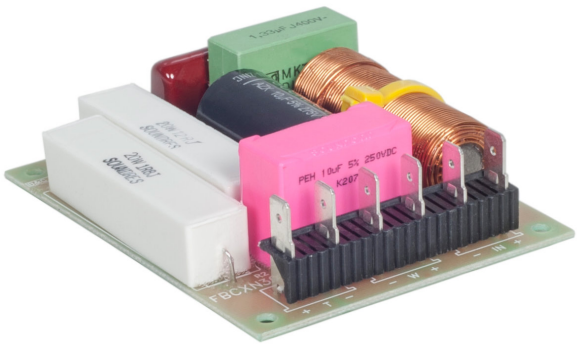

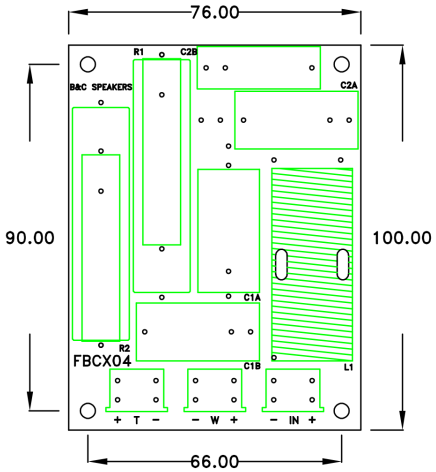


FBCXN36 8 Ω

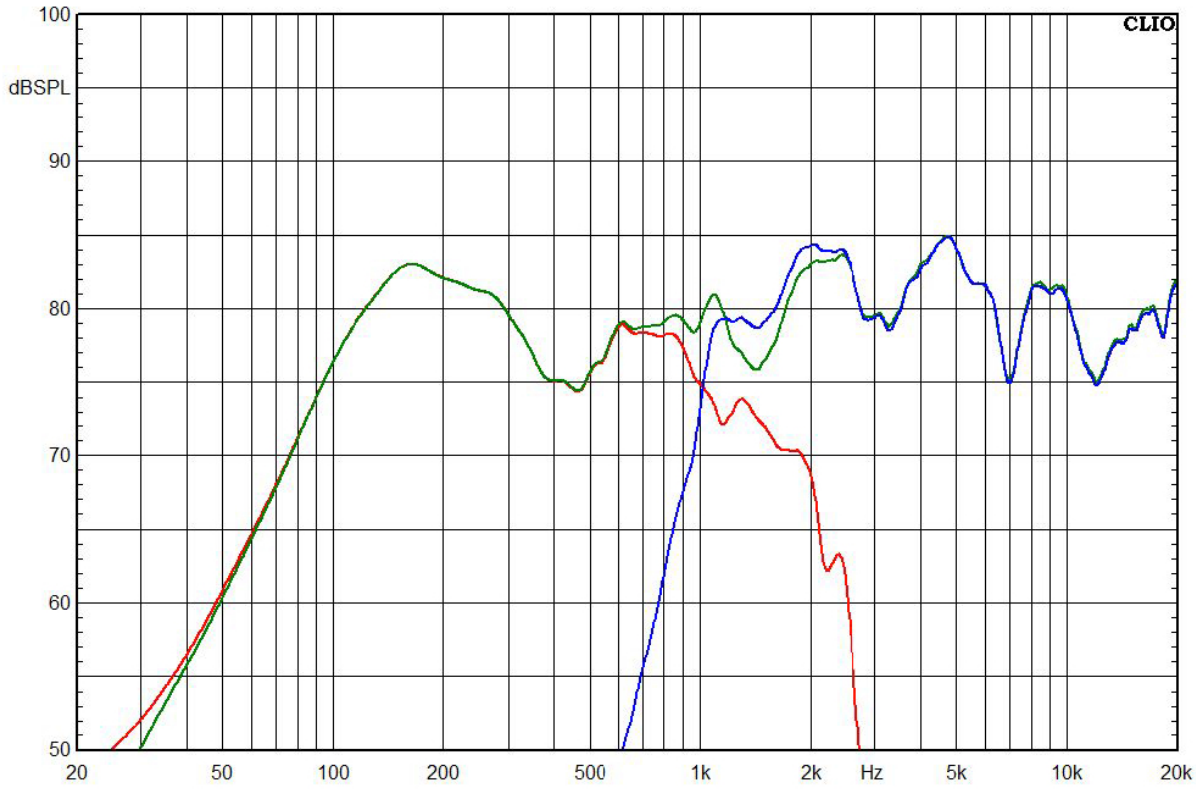

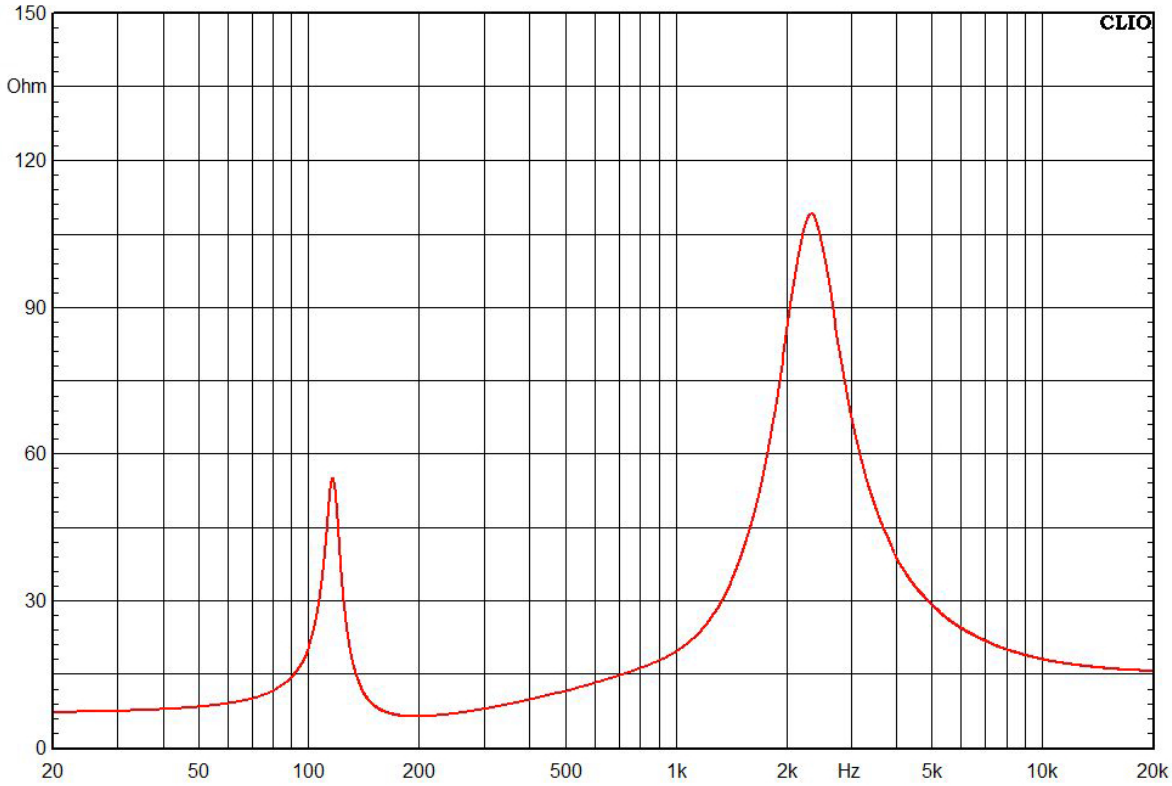

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

FBCXN36 8 Ω

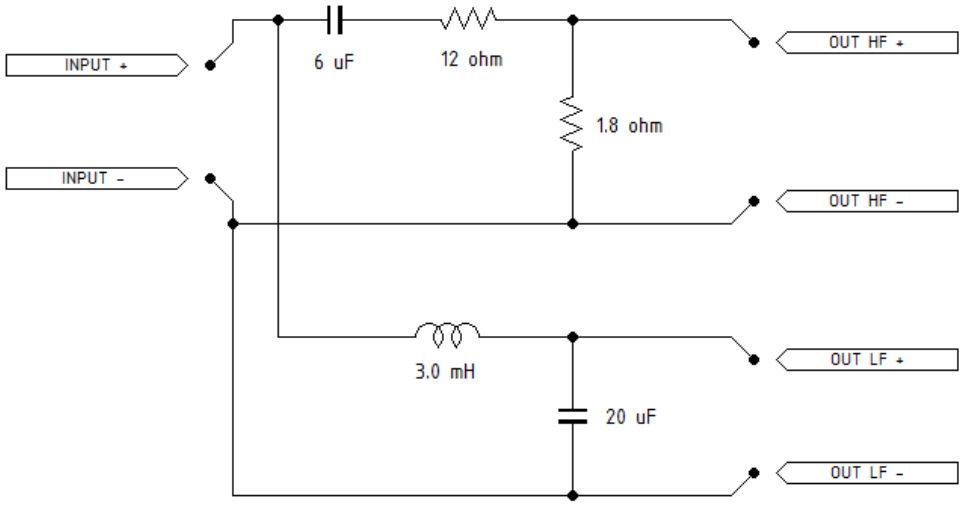

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com