

## FBCXN36 8 Ω

### SPECIFICATIONS


Nominal Impedance	<b>8 Ω</b>
Crossover Frequency	<b>1 kHz</b>
Filter Type	<b>Two Way</b>
Slope	<b>12 - 6 dB/oct</b>
Overall Dimensions	<b>100x76 mm (3.94x2.99 in)</b>

### MOUNTING AND SHIPPING INFO

Net Weight	<b>0.22 kg (0.49 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>0.25 kg (0.54 lb)</b>
Shipping Box	<b>120x125x35 mm (4.72x4.92x1.38 in)</b>


### POTENTIAL APP. COAXIALS

4CXN36	<b>8Ω</b>
5CXN36	<b>8Ω</b>
6CXN36	<b>8Ω</b>


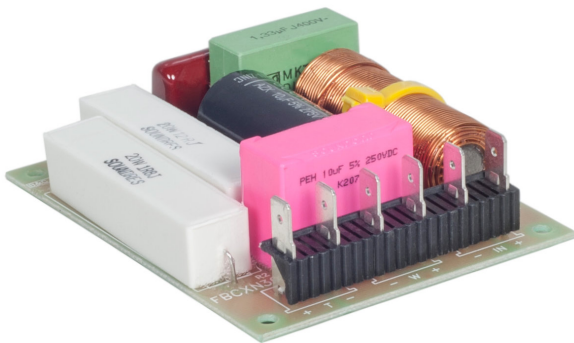


Dedicated crossover network for 4CXN36, 5CXN36 and 6CXN36 Coaxials.

8 Ω low-pass section  
16 Ω high-pass section

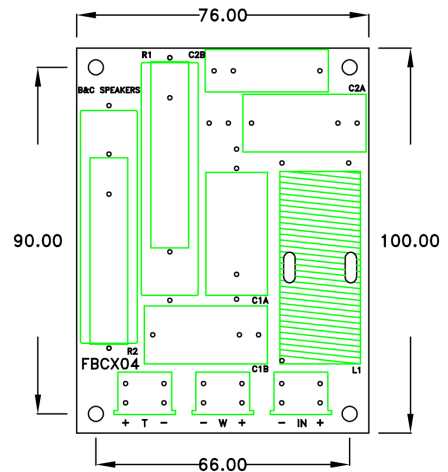

# FBCXN36 8 Ω

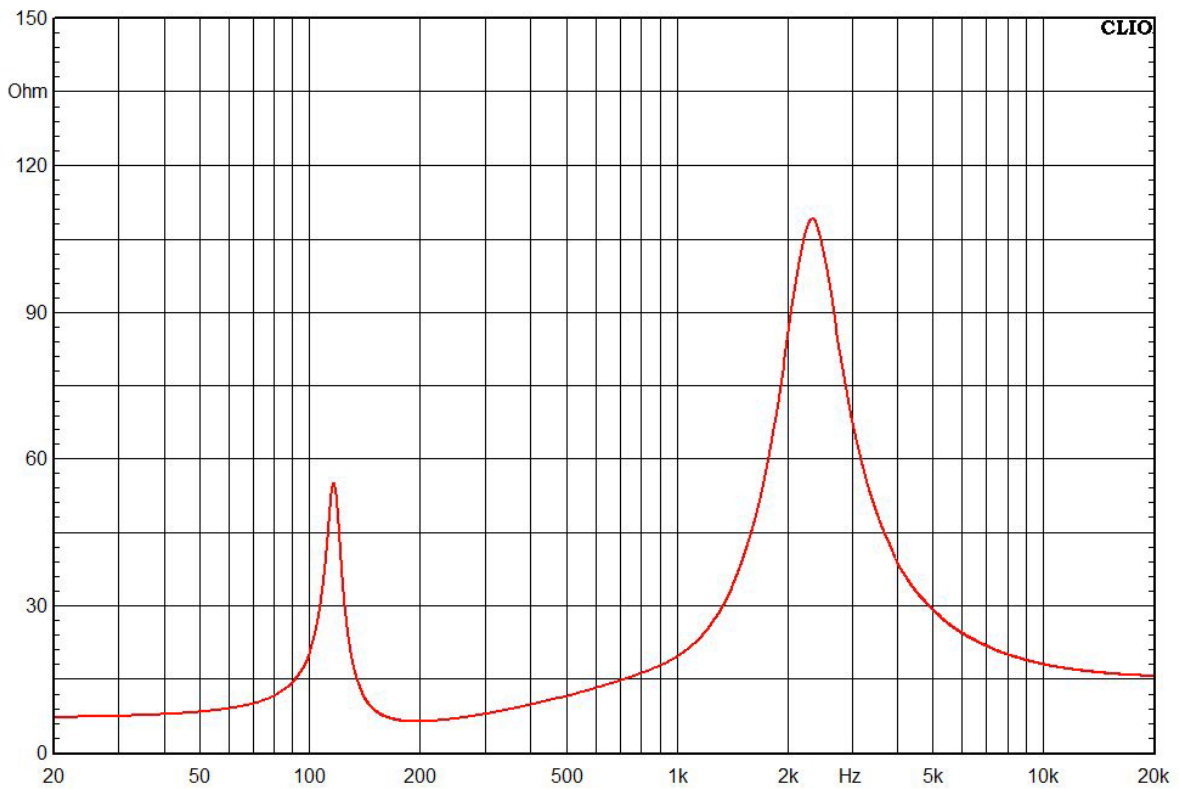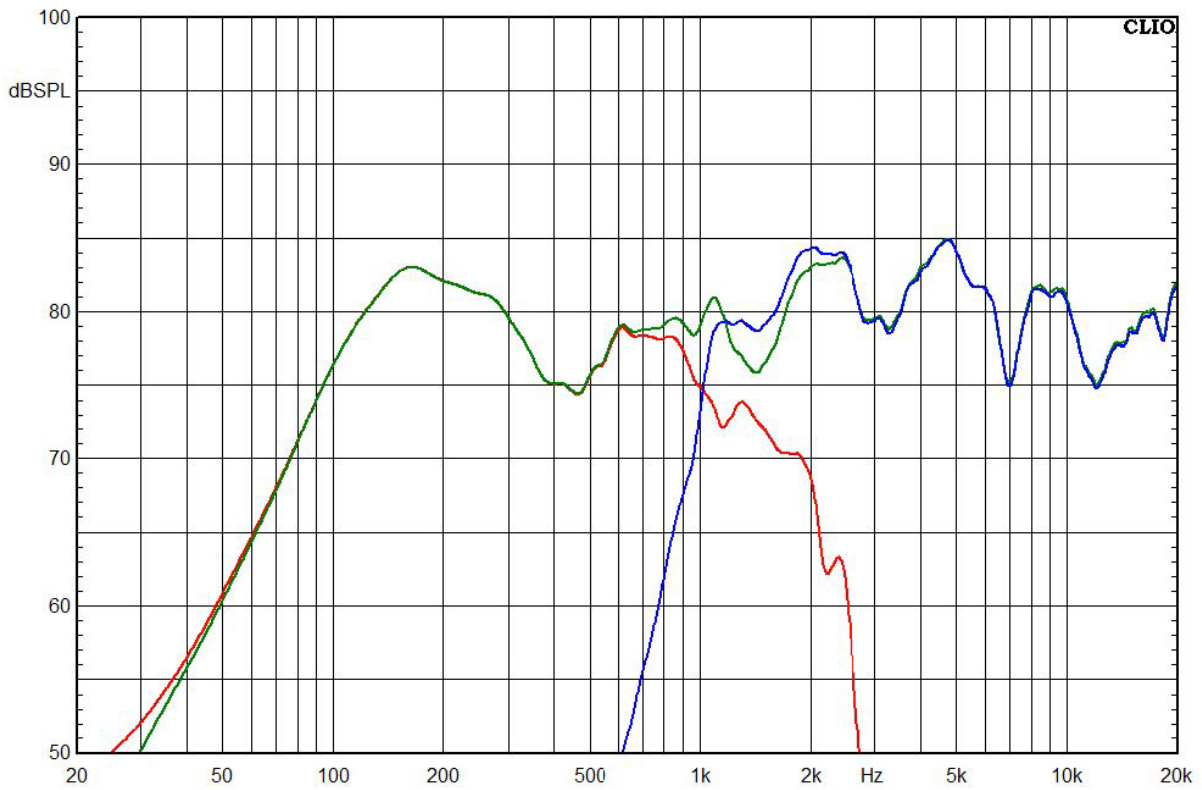

**FBCXN36** 8 Ω

