

DE180 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.4 Ω
Nominal Power Handling	60 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	120 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	106.5 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1 kHz - 17 kHz
Recommended Crossover	2 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.12 mH
Flux Density	1.35 T
Diaphragm Material	Polyimide

- 120 W continuous program power capacity
- 1" horn throat diameter
- 44 mm (1.7 in) aluminium voice coil
- Polyimide diaphragm
- 1000 - 17000 Hz response
- 106.5 dB sensitivity

MOUNTING AND SHIPPING INFO

Two M6 holes 180° on 76 mm (3 in) diameter



Overall Diameter	102 mm (4 in)
Depth	61 mm (2.4 in)
Net Weight	1.7 kg (3.75 lb)
Shipping Units	1 pcs
Shipping Weight	1.73 kg (3.81 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMDE1808
--------------------------	-----------------



DE180 8 Ω

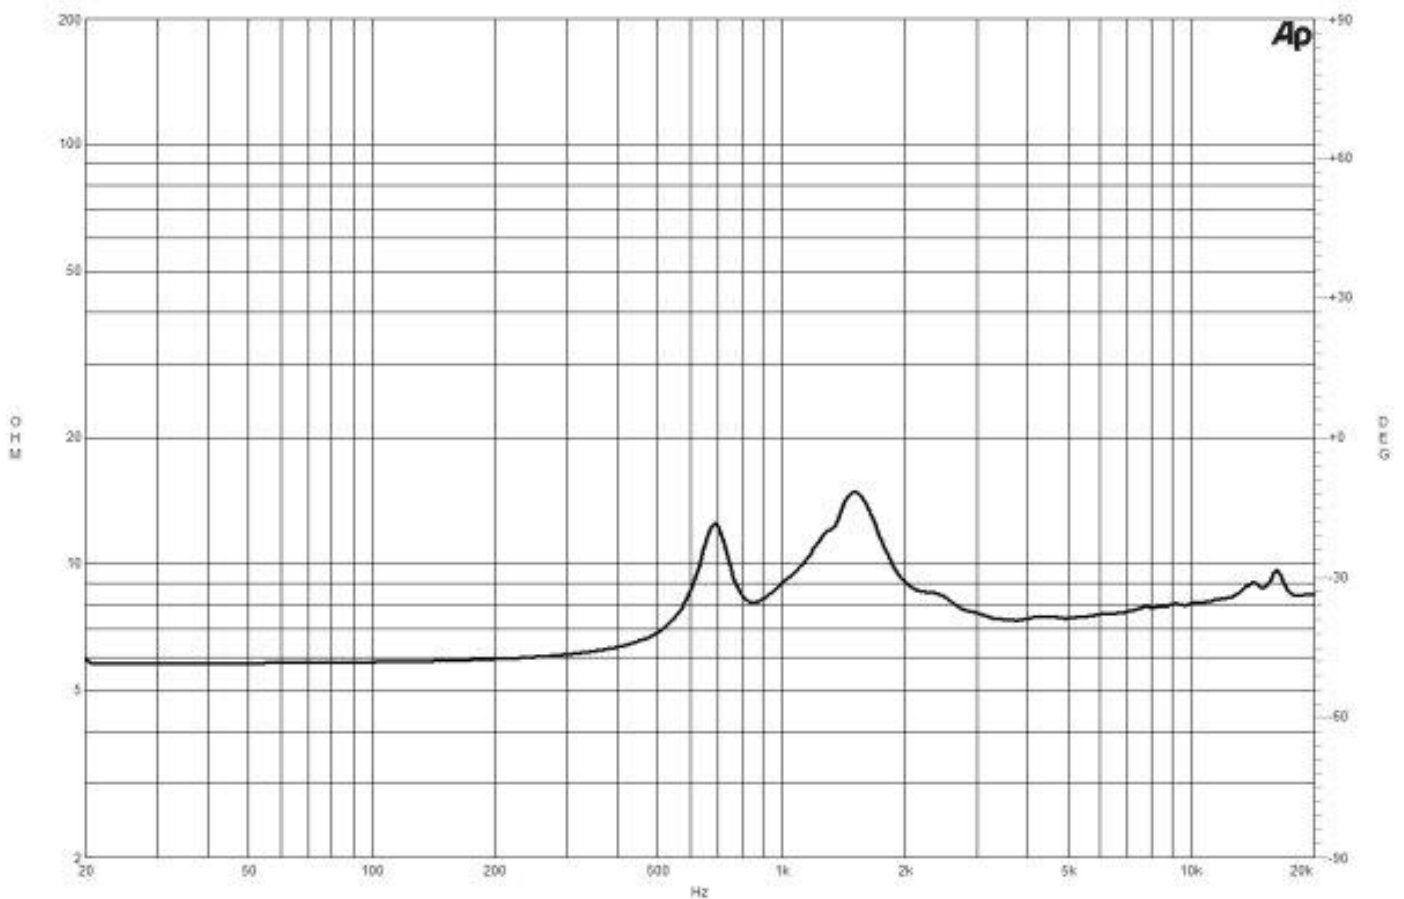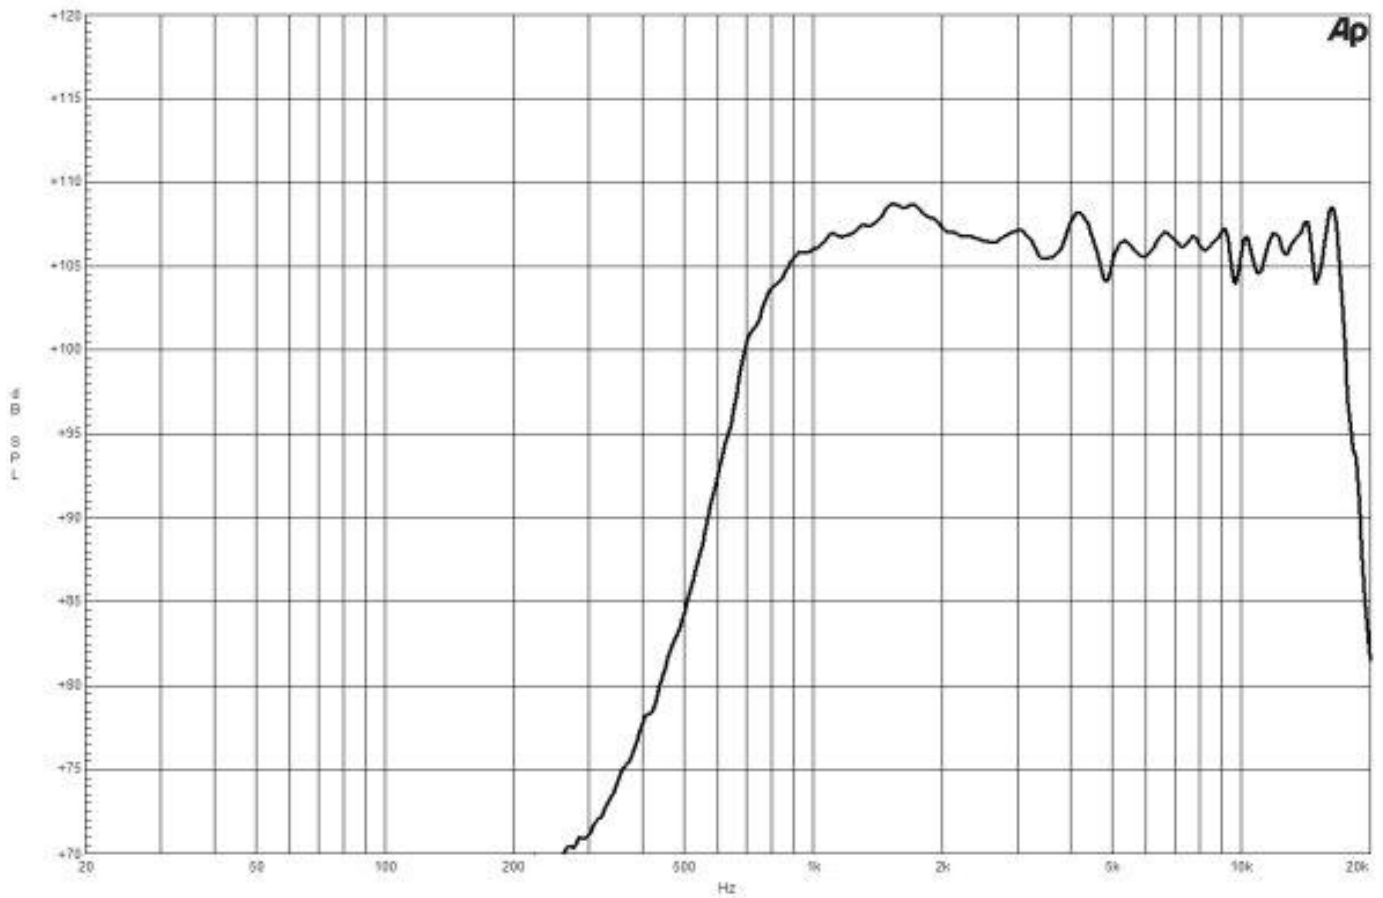

DE180 8 Ω

