
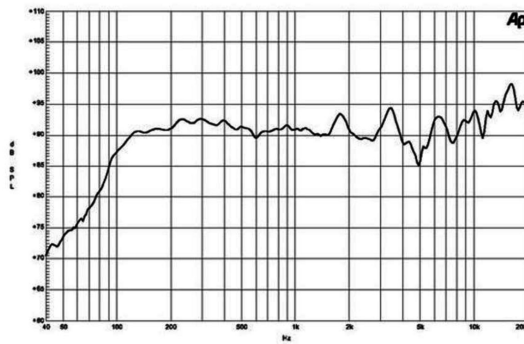

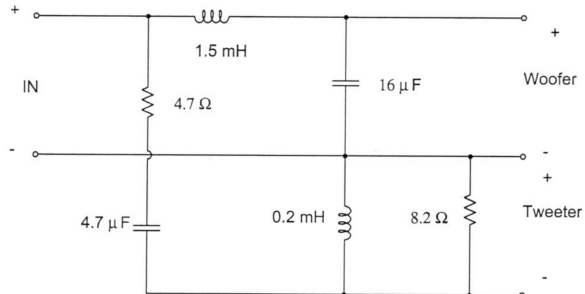


# FB08CX21

8Ω

## Crossovers



### DESCRIPTION

Dedicated crossover network for 8CX21 coaxial speaker

### SPECIFICATIONS

|                     |                          |
|---------------------|--------------------------|
| Nominal Impedance   | 8 Ω                      |
| Crossover Frequency | 2.0 kHz                  |
| Low-pass Slope      | 12.0 dB/oct              |
| High-pass Slope     | 12.0 dB/oct              |
| Overall Dimensions  | 108x97 mm (4.25x3.82 in) |

### MOUNTING AND SHIPPING INFO

|                 |   |
|-----------------|---|
| Net Weight      | 0.4 kg (0.88 lb)                                |
| Shipping Units  | 1   |
| Shipping Weight | 0.43 kg (0.94 lb)                               |
| Shipping Box    | 120x125x35 mm (4.72x4.92x1.38 in)               |
| Other Details   | 6 mm diameter holes on the PCB at 96 mm x 84 mm |