

DE550TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME45 horn

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	8.4 Ω
Nominal Power Handling	70 W
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	140 W
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	108 dB
<small>Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.</small>	
Frequency Range	1 kHz - 17 kHz
Recommended Crossover	1.2 kHz
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	51 mm (2 in)
Winding Material	Aluminium
Inductance	0.12 mH
Flux Density	2 T
Diaphragm Material	Titanium

- 140 W continuous program power capacity
- 1" horn throat diameter
- 51 mm (2 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 17000 Hz response
- 108 dB sensitivity

MOUNTING AND SHIPPING INFO

Two M6 holes 180° on 76 mm (3 in) diameter



Overall Diameter	92 mm (3.62 in)
Depth	49 mm (1.93 in)
Net Weight	1.17 kg (2.58 lb)
Shipping Units	1 pcs
Shipping Weight	1.2 kg (2.65 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMD550TN8
--------------------------	------------------



DE550TN 8 Ω

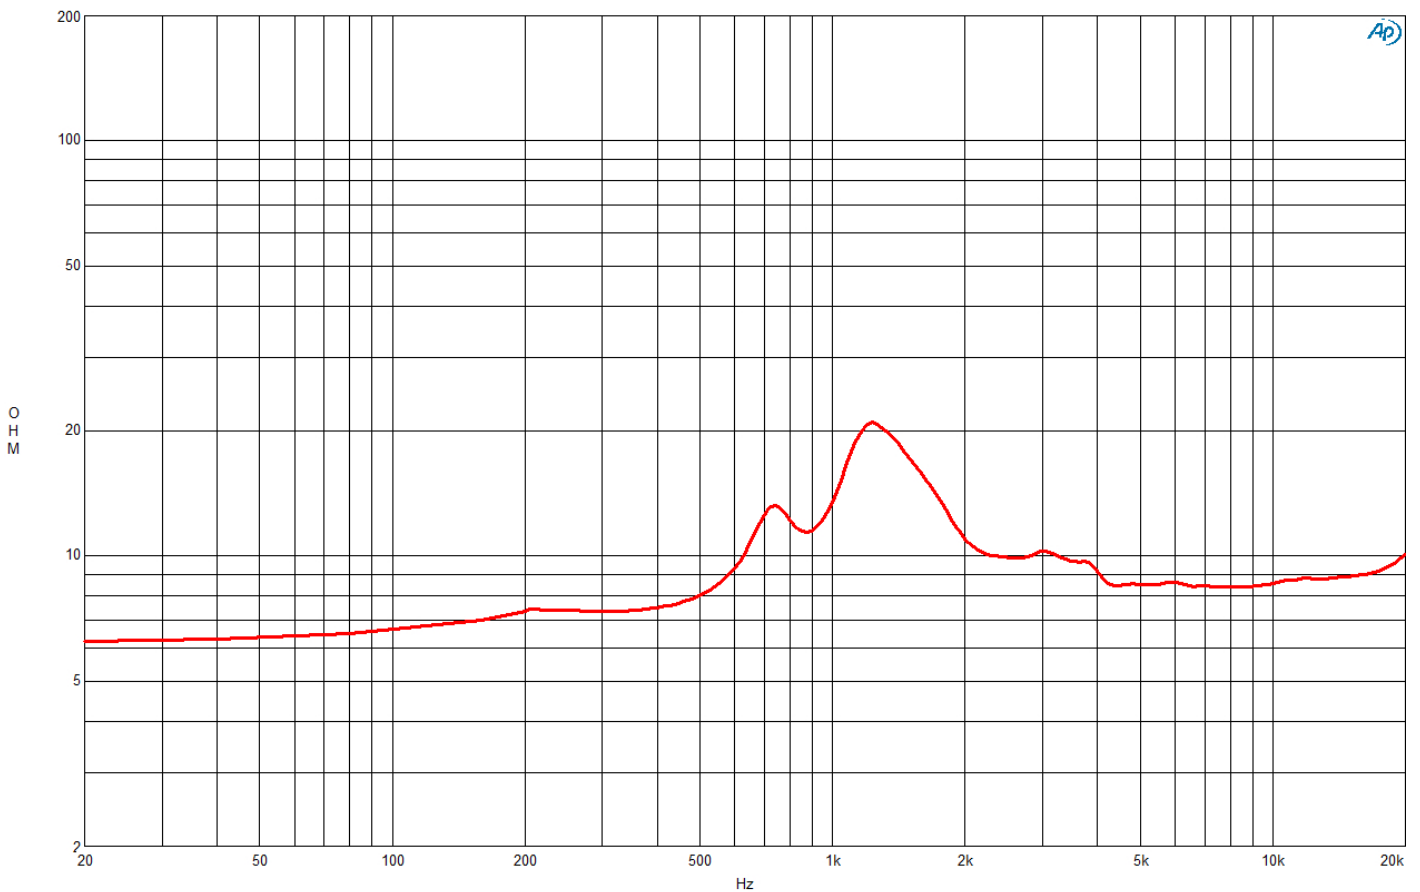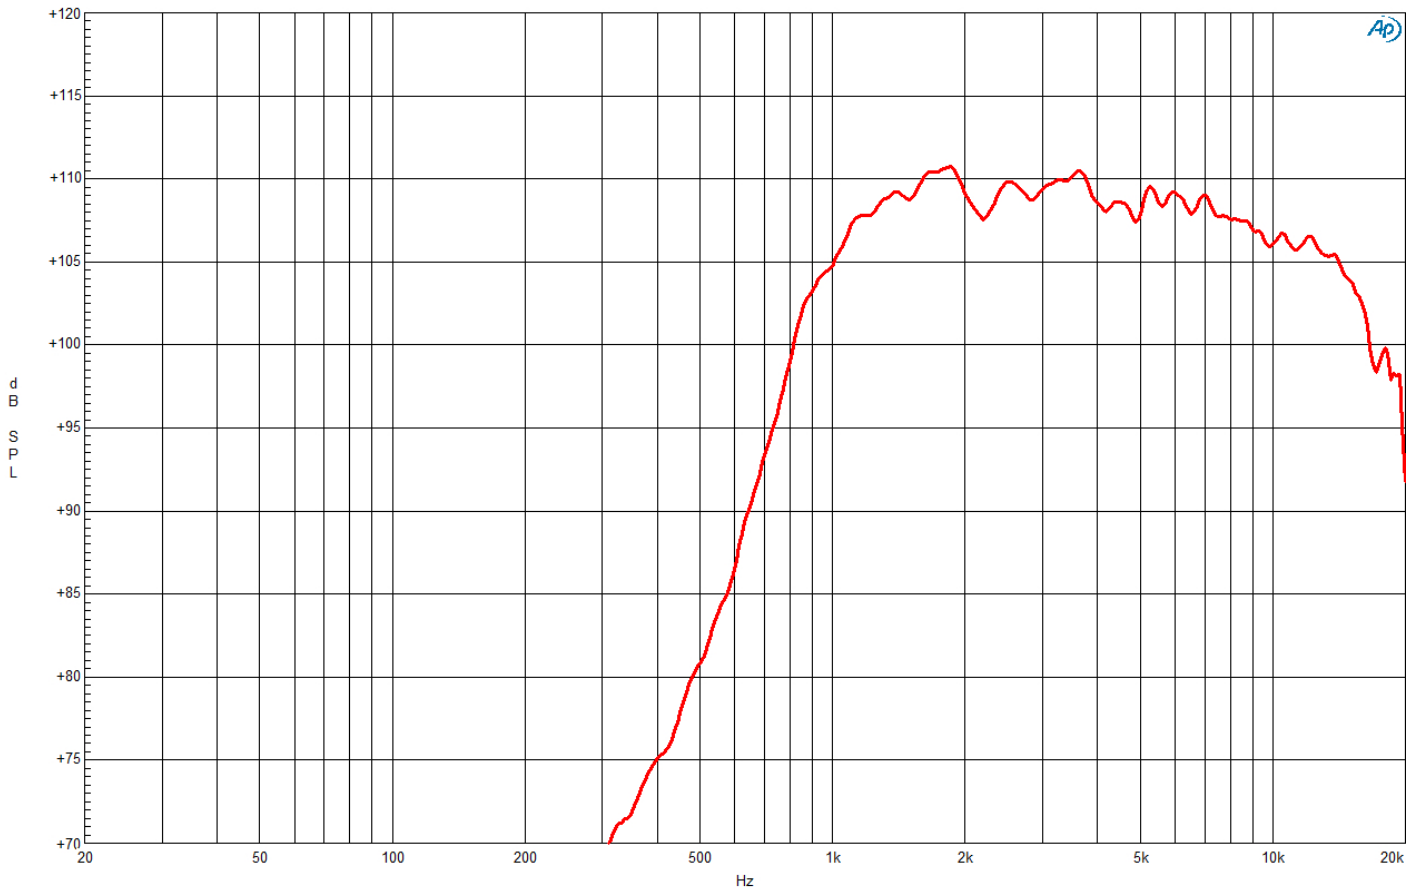

DE550TN 8 Ω

