12FW88 8 Ω

Woofer

- 1400 W continuous program power capacity
- 88 mm (3.5 in) aluminium voice coil
- 50 - 3000 Hz response
- 97 dB sensitivity
- Aluminium demodulating ring allows a very low distortion figure
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression

The FW88 series is perfectly balanced for the loudspeaker systems of today. A performance-oriented range of ferrite woofers with 3.5" (88mm) voice coil and high flux ferrite magnet, incorporated into a compact but powerful motor package. The results are unexpected low frequency output and midrange extension to meet with almost any driver for two way applications. Do more, with less, with the FW88 series.





B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

12FW88 8 Ω

Woofer

SPECIFICATIONS

Nominal Diameter	**320 mm (12 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**6.3 Ω**
Nominal Power Handling 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minumum impedance. Loudspeaker in free air.	**700 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**1400 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**97 dB**
Frequency Range	**50 Hz - 3000 Hz**
Voice Coil Diameter	**88 mm (3.5 in)**
Winding Material	**Aluminium**
Former Material	**Glass Fibre**
Winding Depth	**21.5 mm (0.85 in)**
Magnetic Gap Depth	**11 mm (0.43 in)**
Flux Density	**1.04 T**
Woofer Cone Treatment	**WP Waterproof Front Side**

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	**53 Hz**
Re	**5.1 Ω**
Qes	**0.35**
Qms	**7.7**
Qts	**0.33**
Vas	**45.7 dm^3 (1.61 ft^3)**
Sd	**531 cm^2 (82.31 in^2)**
η0	**2.05 %**
Xmax	**8 mm**
Xvar	**8.6 mm**
Mms	**76.4 g**
Bl	**19.5 Tm**
Le	**0.9 mH**
EBP	**151 Hz**

DESIGN

Surround Shape	**Triple Roll**
Cone Shape	**Exponential**
Magnet Material	**Ferrite**
Spider	**Double Silicone**
Pole Design	**T-Pole**
Woofer Cone Treatment	**WP Waterproof Front Side**
Recommended Enclosure	**40 dm^3 (1.41 ft^3)**
Recommended Tuning	**65 Hz**

MOUNTING AND SHIPPING INFO

Overall Diameter	**315 mm (12.4 in)**
Bolt Circle Diameter	**298 mm (11.73 in)**
Baffle Cutout Diameter	**285 mm (11.22 in)**
Depth	**145 mm (5.71 in)**
Flange and Gasket Thickness	**12 mm (0.49 in)**
Air Volume Occupied by Driver	**2.5 dm^3 (0.09 ft^3)**
Net Weight	**8.25 kg (18.19 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**9.15 kg (20.17 lb)**
Shipping Box	**360x360x200 mm (14.17x14.17x7.87 in)**


SERVICE KITS


LF recone-kits	**RCK12FW888**

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

12FW88 8 Ω


Woofer

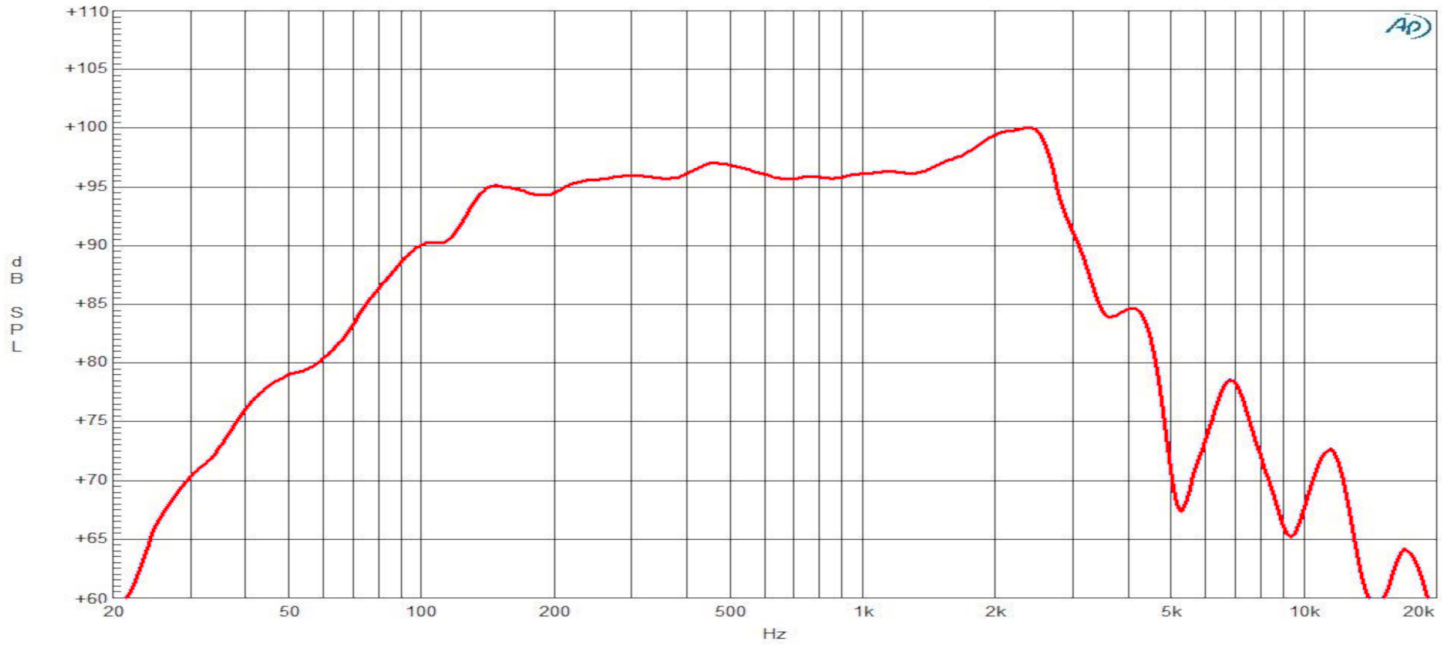

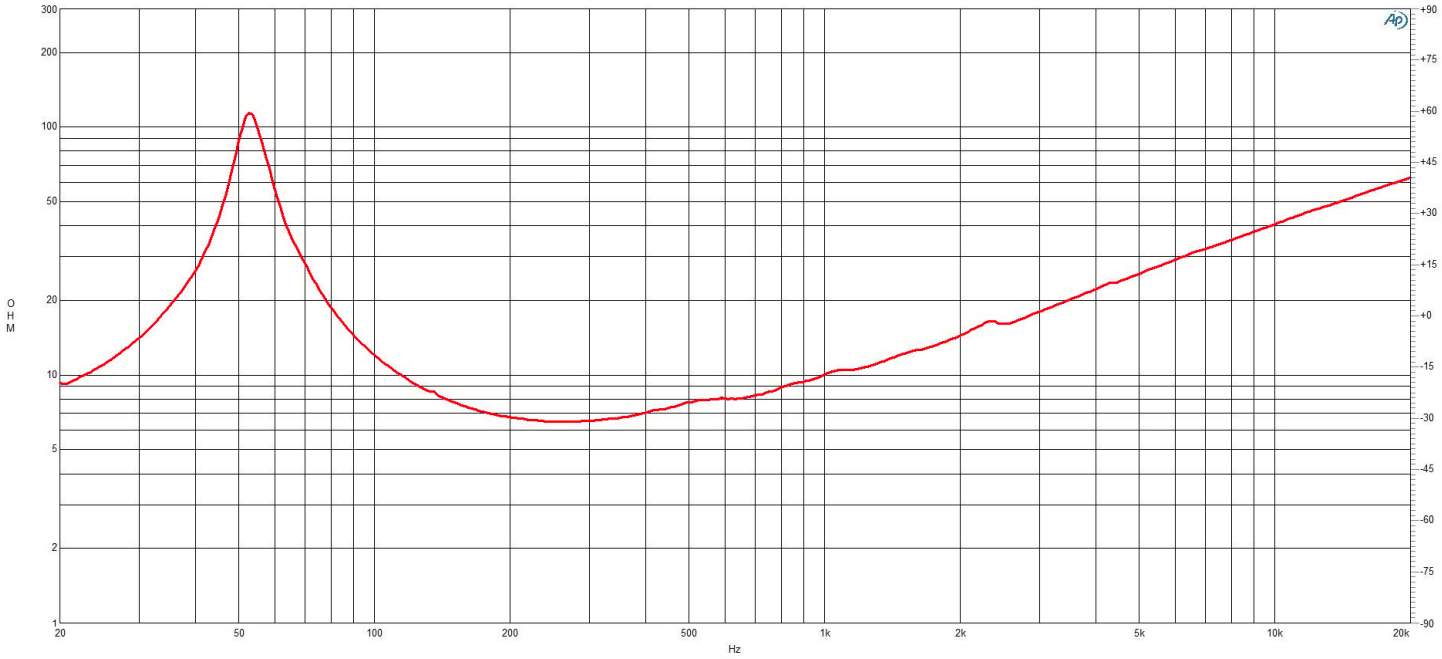

12FW88 8 Ω

Woofer

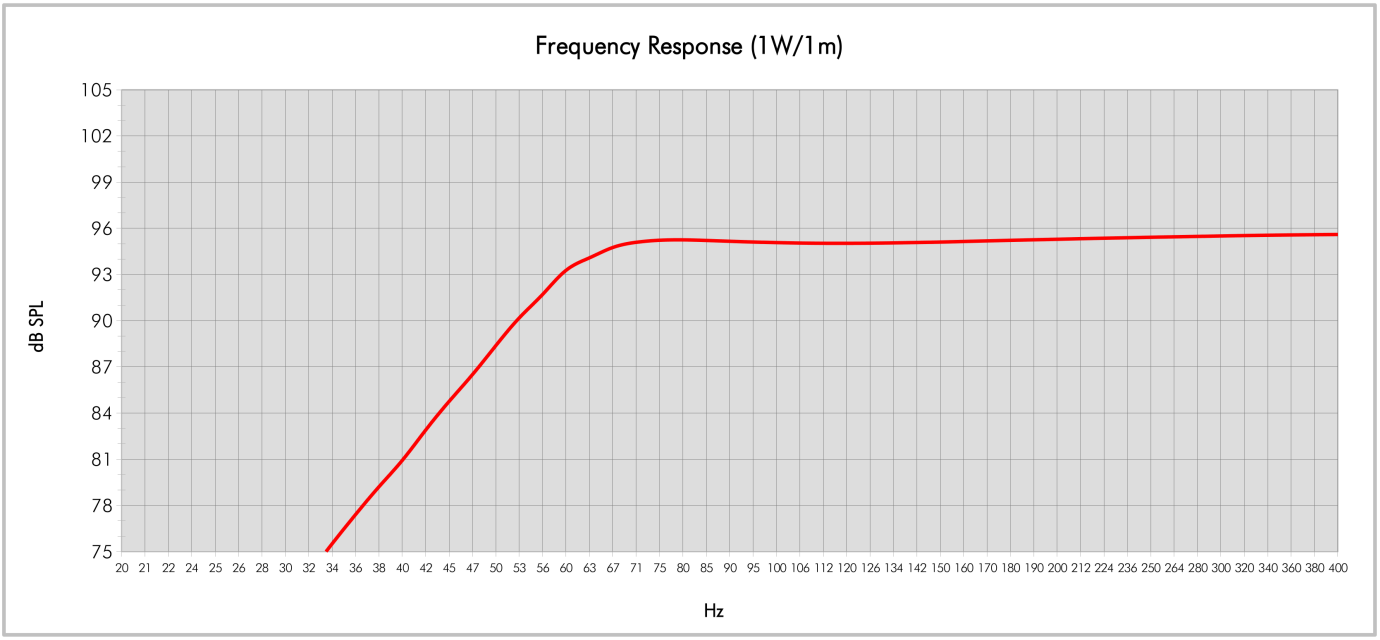



Model:	12FW88		
Enclosure Type:	Bass Reflex	Configuration:	One Driver
Internal Net Volume (Litres):	40	QB:	6
Tuning Frequency (Hz):	60	Port Area (cm²):	170
Frequency (-3 dB) (Hz):	58,7	Port Length (cm):	22,2
Frequency (-10 dB) (Hz):	46,2		

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

12FW88 8 Ω

Woofer

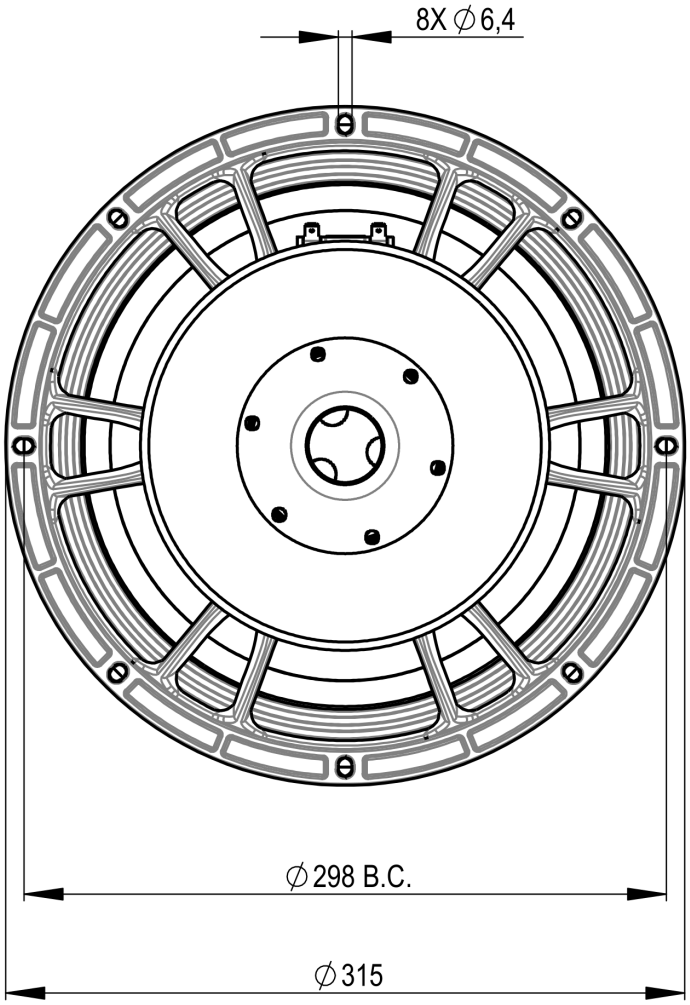

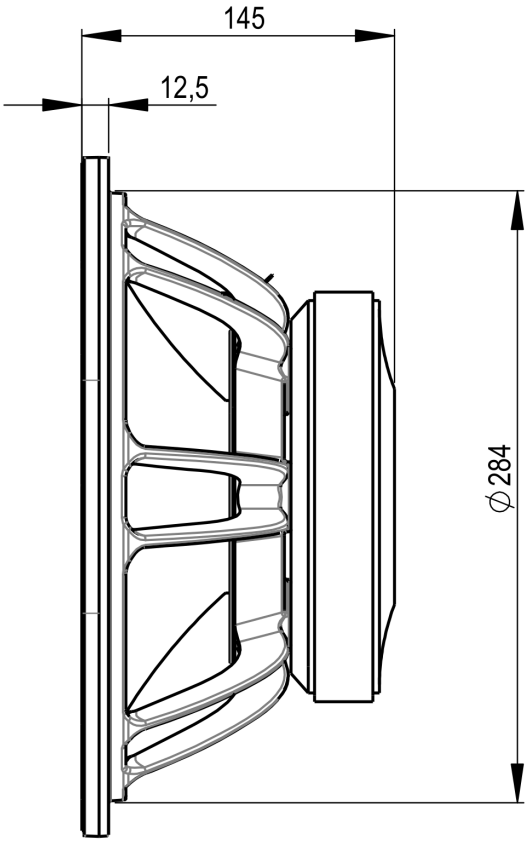

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com